




**Ultrasonic Sensor  
Diffuse Mode Sensor  
RU200-CP40-2UN8X2T/S10**

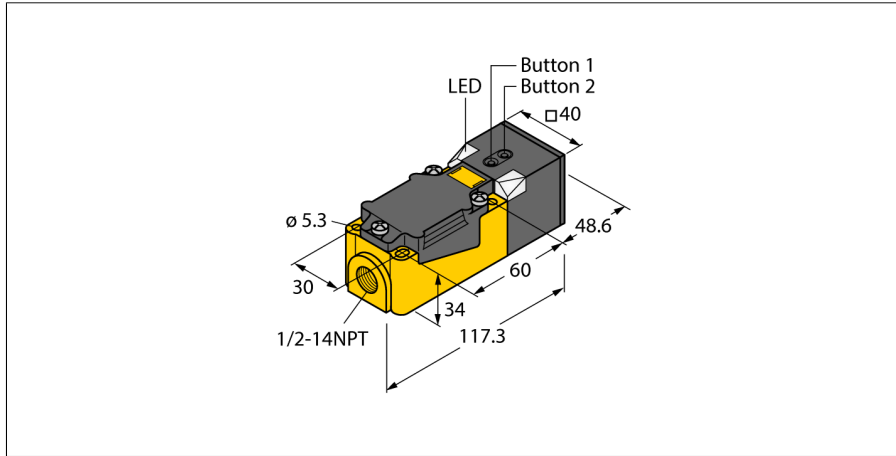

- Separate transducers for transmitter and receiver
- Rectangular housing 40 x 40 x 166 mm
- Connection via screw terminals
- Terminal chamber for cable gland NPT
- Teach range adjustable via button
- Blind zone: 5 cm
- Range: 200 cm
- Resolution: 1 mm
- Sonic cone angle: 60°
- 2 x switching outputs, NPN
- NO/NC programmable

|                                      |  |
|--------------------------------------|--|
| <b>Type designation</b>              | RU200-CP40-2UN8X2T/S10                                     |
| Ident-No.                            | 1610090  |
| <b>Special version</b>               | S10 corresponds to:<br>Mounting base with 1/2-14NPT thread |
| <b>Function</b>                      | Ultrasonic diffuse mode sensor                             |
| Range                                | 50...2000 mm   |
| Resolution                           | 1 mm   |
| minimum switching range              | 20 mm  |
| Ultrasound frequency                 | 120 kHz  |
| Repeat accuracy                      | 0.25 % of full scale                                       |
| Edge lengths of the nominal actuator | 100 mm   |
| Approach speed                       | ≤ 3 m/s  |
| Pass speed                           | ≤ 3 m/s  |
| <b>Operating voltage</b>             | 15...30 VDC  |
| Residual ripple                      | 10 % U <sub>ss</sub>                                       |
| DC rated operational current         | ≤ 150 mA   |
| No-load current I <sub>0</sub>       | ≤ 50 mA  |
| Load resistance                      | ≤ 1000 Ω   |
| Residual current                     | ≤ 0.1 mA   |
| Response time typical                | 160 ms   |
| Readiness delay                      | 300 ms   |
| Output function                      | NO/NC, NPN   |
| Output 1                             | Switching output   |
| Output 2                             | Switching output   |
| Switching frequency                  | 3 Hz   |
| Hysteresis                           | ≤ 20 mm  |
| Voltage drop at I <sub>0</sub>       | ≤ 2.5 V  |
| Short-circuit protection             | yes/ Latching  |
| Reverse polarity protection          | yes  |
| Wire breakage protection             | yes  |
| <b>Design</b>                        | Rectangular, CP40  |
| Radiation direction                  | straight   |
| Dimensions                           | 166 x 40 x 40 mm   |
| Housing material                     | Plastic, PBT-GF30-V0                                       |
| Electrical connection                | Terminal chamber, Terminal box with cable gland, 4-wire    |
| Protection class                     | IP40   |
| Ambient temperature                  | 0...+70 °C   |
| Declaration of conformity EN ISO/IEC | EN 60947-5-2   |
| <b>Switching state</b>               | LED, Yellow  |
| Object detected                      | LED, Green   |

**Wiring Diagram**

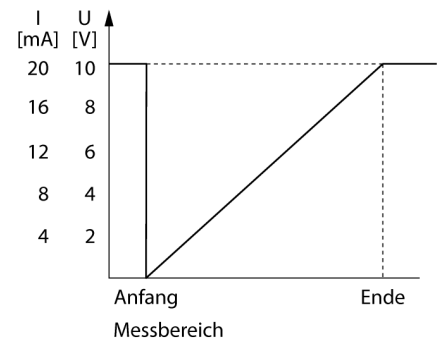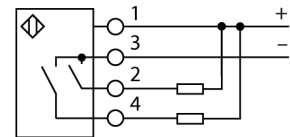

**Functional principle**


Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.

The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 x 20 mm, 100 x 100 mm) and a round rod with a diameter of 27 mm are used.


Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

**Sonic Cone**

**Ultrasonic Sensor**  
**Diffuse Mode Sensor**  
**RU200-CP40-2UN8X2T/S10**

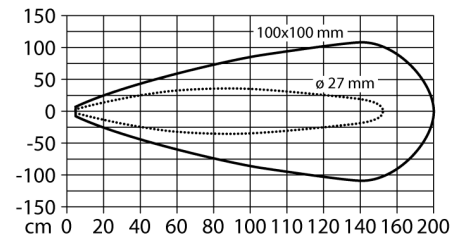

**Ultrasonic Sensor  
Diffuse Mode Sensor  
RU200-CP40-2UN8X2T/S10**

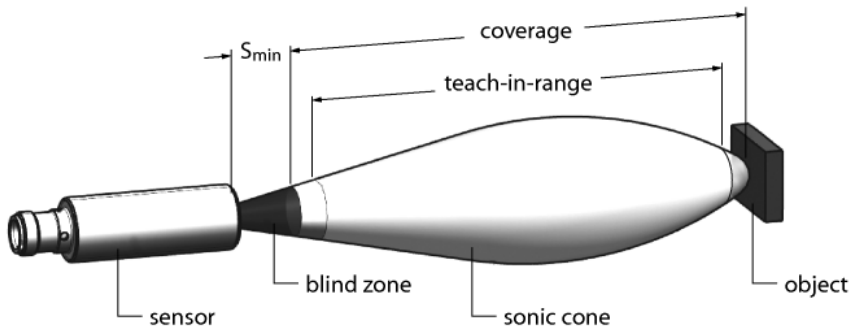

**Setting the limits**

The ultrasonic sensor features two switching outputs with teachable switching range. Teaching via buttons on the housing. The green and yellow LED indicate whether the sensor has detected an object. Various functions such as single switchpoint, window mode or reflection mode to a fixed target can be taught. Further information is described in the operating instructions. How to set the window mode is described below. The limits of the window may be selected freely within the detection range.

- For the first limit value, place object accordingly
- Press and hold button 1 to select output 1 or 2 for 2 or 8 s against Gnd
- Press and hold button 1 for at least 8 s
- For the second limit value, place object accordingly
- Press and hold button 1 for at least 2 s

After successful teaching, the sensor automatically runs in normal operating mode. Unsuccessful teach-in is signalled by the LED flashing slowly at a frequency of 5Hz.

**LED response**

Successful teaching is indicated by a fast flashing green LED. Thereafter, the sensor automatically runs in normal operating mode. Unsuccessful teaching is indicated by the LED flashing alternately green and yellow. In normal operating mode both LEDs signal the switching state of output 1.

- green: object is in the detection range but not in the switching range
- yellow: object is in the switching range
- off: object is outside the switching range