



FREQUENCY/VOLTAGE-CURRENT-CONVERTER

IN: 0..100 kHz - OUT: 0..10 V / (0)4..20 mA

INPUT: 0...1, 0...10, 0...100 kHz
 OUTPUT: 0...10 V DC, 0...20 mA, 4...20 mA
 Spring clamp terminals
 Input and output galvanically separated

[Link to Product](#)

Illustration

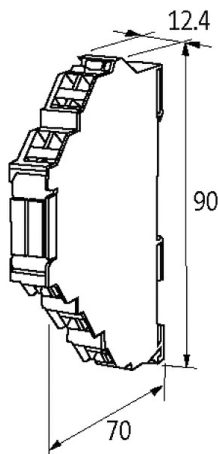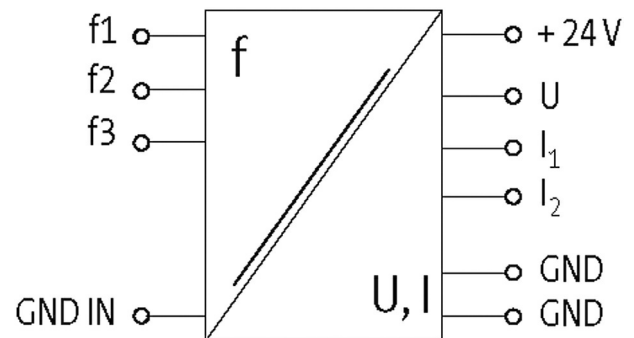

Product may differ from Image

Technical Data

Operating voltage	24 V DC $\pm 20\%$
Operating current	max. 80 mA
Response time	max. 350 ms
Tolerance	0.5% from end value

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C
Test isolation voltage	2.5 kV
Dimensions HxWxD	92x12.4x70 mm

Description

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Functional description The new frequency converter in the slim MIRO housing can be universally used. The frequency that is applied on the three inputs, will be galvanically isolated, transformed and is available as analog signal on all three outputs.

Voltage output signals

Output signal 0...10 V DC, 0...20 mA, 4...20 mA

Commercial data

country of origin	CZ
customs tariff number	85437090
EAN	4048879022392
eClass	27210990
Packaging unit	1.000