

Withdrawable circuit breaker with guide frame, IEC 60947-2, frame size 1, 3-poles,  $I_n=1600\text{A}$ , breaking capacity E, up to 1000V AC 50/60Hz,  $I_{cu}=85/50\text{kA}$  at 690/1000V, Trip unit ETU300 LSI optimized for standard applications, without display Protection LT, ST, INST, N-protection required an external N-sensor, incl. trip alarm switch (1xCO), rear connection horizontal, guide frame with shutter and w/o position signalling switch, without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 2NO+2NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), without 2nd shunt trip, without 1st Shunt trip

Model	
product brand name	SENTRON
product designation	Air circuit breaker
suitability for use	circuit breaker
size of the circuit-breaker	1
number of poles	3
position / of neutral conductor	no internal N-conductor
fastening method	withdrawable circuit breaker
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
design of the electronic trip unit	ETU300 LSI
Weight	79.172 kg
Net Weight	66.172 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	1000 V
power loss [W] / maximum	310 W
Current	
continuous current / rated value / maximum	1600 A
continuous current / rated value	1600 A
operational current	
• at 40 °C / rated value	1600 A
• at 45 °C / rated value	1600 A
• at 50 °C / rated value	1600 A
• at 55 °C / rated value	1600 A
• at 60 °C / rated value	1600 A
• at 70 °C / rated value	1490 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	E
maximum short-circuit current breaking capacity ( $I_{cu}$ )	
• at 500 V / rated value	85 kA
• at 690 V / rated value	85 kA
• at 1000 V / rated value	50 kA
operating short-circuit current breaking capacity ( $I_{cs}$ )	
• at 500 V / rated value	85 kA
• at 690 V / rated value	85 kA

<ul style="list-style-type: none"> <li>• at 1000 V / rated value</li> </ul>	50 kA
short-circuit current making capacity (I <sub>cm</sub> )	
<ul style="list-style-type: none"> <li>• at 690 V / rated value</li> </ul>	187 kA
<ul style="list-style-type: none"> <li>• at 1000 V / rated value</li> </ul>	105 kA
short-time withstand current (I <sub>cw</sub> ) / at 690 V AC	
<ul style="list-style-type: none"> <li>• for 0.5 s / rated value</li> </ul>	85 kA
<ul style="list-style-type: none"> <li>• for 1 s / rated value</li> </ul>	85 kA
<ul style="list-style-type: none"> <li>• for 2 s / rated value</li> </ul>	70 kA
<ul style="list-style-type: none"> <li>• for 3 s / rated value</li> </ul>	60 kA
short-time withstand current (I <sub>cw</sub> ) / at 1000 V AC	
<ul style="list-style-type: none"> <li>• for 0.5 s / rated value</li> </ul>	50 kA
<ul style="list-style-type: none"> <li>• for 1 s / rated value</li> </ul>	50 kA
<ul style="list-style-type: none"> <li>• for 2 s / rated value</li> </ul>	50 kA
<ul style="list-style-type: none"> <li>• for 3 s / rated value</li> </ul>	50 kA
<b>Electronic release unit</b>	
product feature	
<ul style="list-style-type: none"> <li>• upgradable</li> </ul>	No
<ul style="list-style-type: none"> <li>• Bluetooth and USB interface</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder for basic protection functions</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• display and function keys</li> </ul>	No
<ul style="list-style-type: none"> <li>• SENTRON powerconfig configuration software</li> </ul>	No
<b>Basic protection functions</b>	
product feature / for L-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	No
<ul style="list-style-type: none"> <li>• selectable characteristic function</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	No
set values setting current (I <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	0.4;0.5;0.6;0.7;0.75;0.8;0.85;0.9;0.95;1
reference value setting current (I <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	x I <sub>n</sub>
set values delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	0.75;1;2;5;8;10;14;17;21;25
reference value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	s
<b>L: Overload protection N-conductor</b>	
product feature / with neutral conductor protection / can be switched on/off	No
setting values setting current (I <sub>nN</sub> ) / for N-tripping	1
reference value setting current (I <sub>nN</sub> ) / for N-tripping	x I <sub>n</sub>
<b>S: delayed short-circuit protection ST</b>	
product feature / for S-tripping	
<ul style="list-style-type: none"> <li>• independent of direction / can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• independent of direction / selectable characteristic function</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	No
<b>S: delayed short-circuit protection ST, settings values I<sub>0t</sub></b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	x I <sub>r</sub>
set values delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	0.08;0.15;0.22;0.3;0.4
reference value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	s
<b>S: delayed short-circuit protection ST, settings values I<sub>2t</sub></b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	x I <sub>r</sub>
set values delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	0.08;0.15;0.22;0.3;0.4
product feature / for I-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable (with eSet)</li> </ul>	No

set values setting current (Ii) / for I-tripping	1.5;2;3;4;5;6;8;10;12;15
reference value setting current (Ii) / for I-tripping	x In
<b>G: ground fault GF</b>	
product feature / for G-tripping	
<ul style="list-style-type: none"> <li>selectable characteristic function</li> </ul>	No
<b>Further protective functions</b>	
protection function	
<ul style="list-style-type: none"> <li>maintenance mode DAS+</li> </ul>	Yes
<b>Measuring functions</b>	
measurement function	
<ul style="list-style-type: none"> <li>current measurement</li> </ul>	Yes
<b>Communication</b>	
communication function	No
<b>Service Life</b>	
mechanical service life (operating cycles)	
<ul style="list-style-type: none"> <li>without support / typical</li> </ul>	10000
<ul style="list-style-type: none"> <li>with support / typical</li> </ul>	20000
electrical endurance (operating cycles)	
<ul style="list-style-type: none"> <li>at 690 V / without support / typical</li> </ul>	10000
<ul style="list-style-type: none"> <li>at 690 V / with support / typical</li> </ul>	20000
<ul style="list-style-type: none"> <li>at 1000 V / without support / typical</li> </ul>	1000
<b>Dimensions</b>	
height	518 mm
width	320 mm
depth	471 mm
<b>Main connection</b>	
arrangement of electrical connectors / for main current circuit	main connection on the rear, horizontal
<b>Auxiliary circuit</b>	
design of the auxiliary switch	2 NO + 2 NC
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
number of CO contacts / for auxiliary contacts	0
<b>Internal accessories</b>	
product component	
<ul style="list-style-type: none"> <li>undervoltage release</li> </ul>	No
<ul style="list-style-type: none"> <li>voltage trigger</li> </ul>	No
<ul style="list-style-type: none"> <li>trip indicator</li> </ul>	Yes
<ul style="list-style-type: none"> <li>motor drive</li> </ul>	No
<b>Environmental conditions</b>	
protection class IP / on the front	IP20
ambient temperature / during operation	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	-40 °C
<ul style="list-style-type: none"> <li>maximum</li> </ul>	70 °C
ambient temperature / during storage	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	-40 °C
<ul style="list-style-type: none"> <li>maximum</li> </ul>	80 °C
<b>Certificates</b>	
reference code / according to IEC 81346-2	Q
<b>Approvals / Certificates</b>	
Environment	General Product Approval



Siemens  
EcoTech



[Confirmation](#)



General Product Approval

EMV

Radio Equipment  
Type Approval Certificate

Test Certificates



[Miscellaneous](#)

[Miscellaneous](#)

[Special Test Certificate](#)

#### Maritime application

#### other



[Confirmation](#)



[Manufacturer Declaration](#)

#### Dangerous goods

[Transport Information](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (catalogues, leaflets,...)

<https://www.siemens.com/energy-automation>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1116-8AB32-0AA0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1116-8AB32-0AA0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA1116-8AB32-0AA0](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1116-8AB32-0AA0)


##### CAX-Online-Generator

<https://www.siemens.com/cax>

##### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

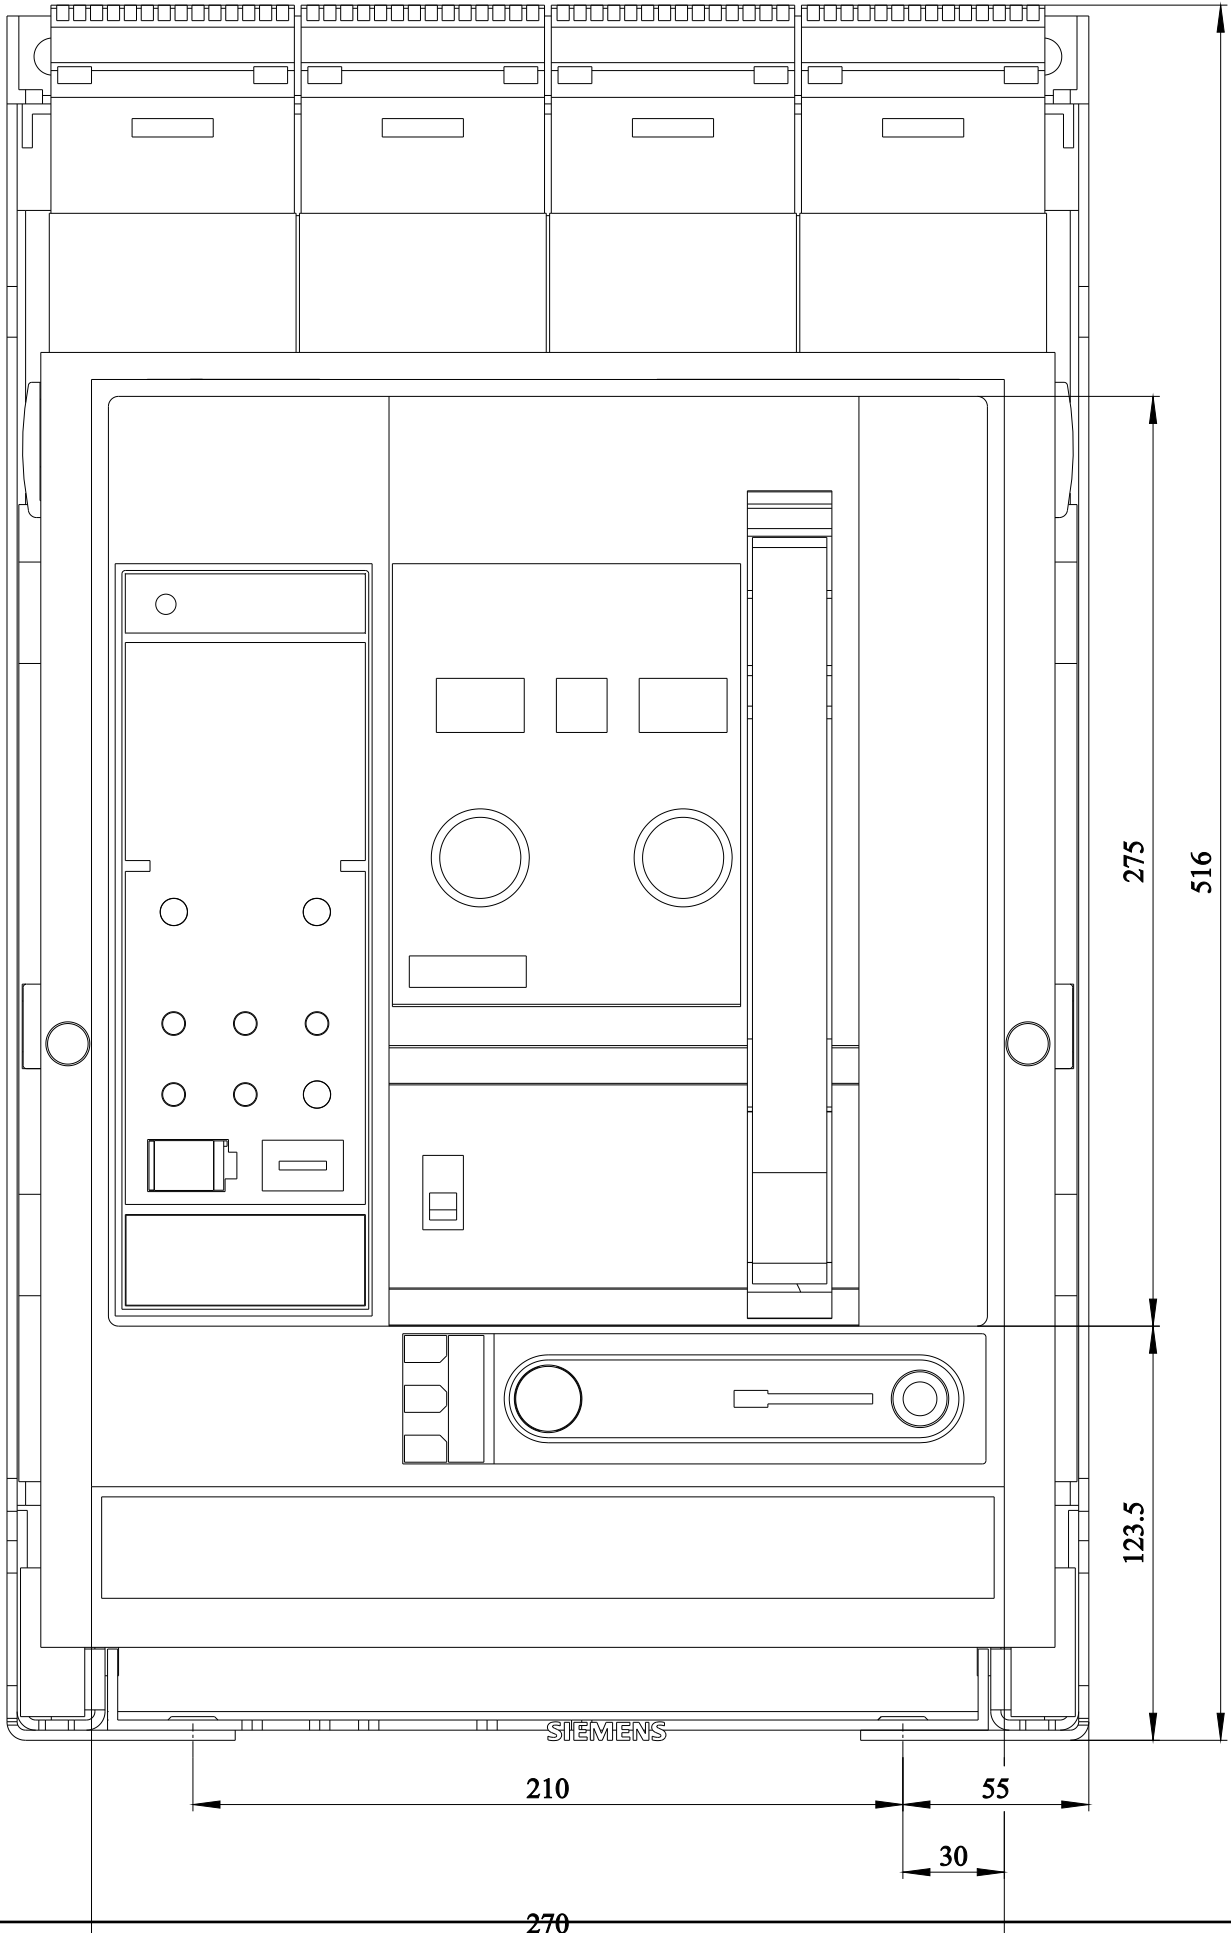

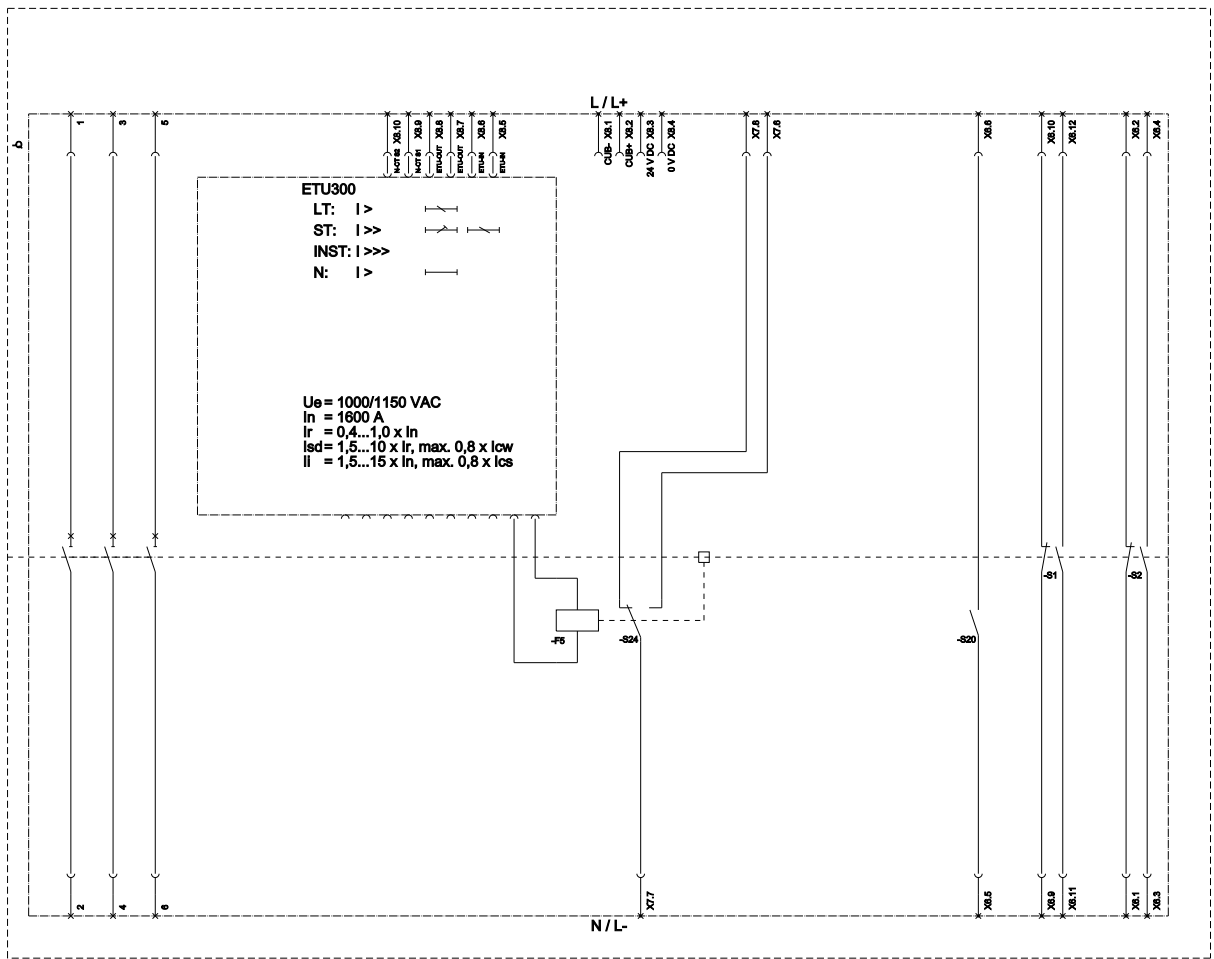

LT (Long Time Delay / Überlastschutz), ST (Short Time Delay / Kurzschlusschutz, Inzertzeitverzögerung), INST (Instantaneous / Kurzschlusschutz, unverzögert), N (Neutral Protection / Neutralleiterenschutz), CP (Circuit Breaker Protection / Erdschlusschutz),  
 F5 (fuse for the trip unit / Anstößsicherung), S24 (TAS: 1st trip alarm switch (Reset position) / Erste Anstößsicherungsbehalter (Reset Position), S1-S3 (AUX: Auxiliary switch / Hilfsbehalter), S20 (RTC: Ready to close signalling switch / Bereitschaftsschaltbehalter),  
 F50: position signalling switch module / Positionsschaltbehaltermodul.

last modified:

11/24/2025

