



## Main

Product or component type	Servo motor
Device short name	BSH
Maximum mechanical speed	9000 rpm
Continuous stall torque	1.05 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 1.05 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 1.3 N.m for LXM05AD10M2, 200...240 V, single phase 1.3 N.m for LXM05BD10M2, 200...240 V, single phase 1.3 N.m for LXM05CD10M2, 200...240 V, single phase 1.3 N.m for LXM05AD10M3X, 200...240 V, three phase 1.3 N.m for LXM05BD10M3X, 200...240 V, three phase 1.3 N.m for LXM05CD10M3X, 200...240 V, three phase 1.3 N.m for LXM15LD13M3, 230 V, single phase 1.3 N.m for LXM15LD13M3, 230 V, three phase 1.3 N.m for LXM15LD10N4, 400 V, three phase 1.3 N.m for LXM05AD14N4, 380...480 V, three phase 1.3 N.m for LXM05BD14N4, 380...480 V, three phase 1.3 N.m for LXM05CD14N4, 380...480 V, three phase
Peak stall torque	3.5 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase 3.5 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase 2.7 N.m for LXM15LD13M3, 230 V, single phase 3.18 N.m for LXM05AD10M2, 200...240 V, single phase 3.18 N.m for LXM05BD10M2, 200...240 V, single phase 3.18 N.m for LXM05CD10M2, 200...240 V, single phase 2.7 N.m for LXM15LD13M3, 230 V, three phase 3.87 N.m for LXM15LD10N4, 400 V, three phase 3.18 N.m for LXM05AD10M3X, 200...240 V, three phase 3.87 N.m for LXM05AD14N4, 380...480 V, three phase 3.18 N.m for LXM05BD10M3X, 200...240 V, three phase 3.87 N.m for LXM05BD14N4, 380...480 V, three phase 3.18 N.m for LXM05CD10M3X, 200...240 V, three phase 3.87 N.m for LXM05CD14N4, 380...480 V, three phase
Nominal output power	400 W for LXM32.U60N4 at 1.5 A, 400 V, three phase 400 W for LXM32.U60N4 at 1.5 A, 480 V, three phase 340 W for LXM15LD13M3, 230 V, three phase 340 W for LXM15LD13M3, 230 V, single phase 350 W for LXM05AD10M2, 200...240 V, single phase 350 W for LXM05BD10M2, 200...240 V, single phase

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	<p>350 W for LXM05CD10M2, 200...240 V, single phase</p> <p>350 W for LXM05AD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05AD14N4, 380...480 V, three phase</p> <p>350 W for LXM05BD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05BD14N4, 380...480 V, three phase</p> <p>350 W for LXM05CD10M3X, 200...240 V, three phase</p> <p>350 W for LXM05CD14N4, 380...480 V, three phase</p> <p>670 W for LXM15LD10N4, 400 V, three phase</p>
Nominal torque	<p>0.65 N.m for LXM32.U60N4 at 1.5 A, 400 V, three phase</p> <p>0.65 N.m for LXM32.U60N4 at 1.5 A, 480 V, three phase</p> <p>1.08 N.m for LXM15LD13M3, 230 V, single phase</p> <p>1.1 N.m for LXM05AD10M2, 200...240 V, single phase</p> <p>1.1 N.m for LXM05BD10M2, 200...240 V, single phase</p> <p>1.1 N.m for LXM05CD10M2, 200...240 V, single phase</p> <p>0.8 N.m for LXM15LD10N4, 400 V, three phase</p> <p>1.08 N.m for LXM15LD13M3, 230 V, three phase</p> <p>1.1 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>1.1 N.m for LXM05AD14N4, 380...480 V, three phase</p> <p>1.1 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>1.1 N.m for LXM05BD14N4, 380...480 V, three phase</p> <p>1.1 N.m for LXM05CD10M3X, 200...240 V, three phase</p> <p>1.1 N.m for LXM05CD14N4, 380...480 V, three phase</p>
Nominal speed	<p>6000 rpm for LXM32.U60N4 at 1.5 A, 400 V, three phase</p> <p>6000 rpm for LXM32.U60N4 at 1.5 A, 480 V, three phase</p> <p>3000 rpm for LXM05AD10M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05BD10M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05CD10M2, 200...240 V, single phase</p> <p>3000 rpm for LXM05AD10M3X, 200...240 V, three phase</p> <p>3000 rpm for LXM05AD14N4, 380...480 V, three phase</p> <p>3000 rpm for LXM05BD10M3X, 200...240 V, three phase</p> <p>3000 rpm for LXM05BD14N4, 380...480 V, three phase</p> <p>3000 rpm for LXM05CD10M3X, 200...240 V, three phase</p> <p>3000 rpm for LXM05CD14N4, 380...480 V, three phase</p> <p>3000 rpm for LXM15LD13M3, 230 V, single phase</p> <p>3000 rpm for LXM15LD13M3, 230 V, three phase</p> <p>8000 rpm for LXM15LD10N4, 400 V, three phase</p>
Product compatibility	<p>LXM05AD10M2 at 200...240 V single phase</p> <p>LXM05BD10M2 at 200...240 V single phase</p> <p>LXM05CD10M2 at 200...240 V single phase</p> <p>LXM15LD13M3 at 230 V single phase</p> <p>LXM32.U60N4 at 400 V three phase</p> <p>LXM32.U60N4 at 480 V three phase</p> <p>LXM05AD10M3X at 200...240 V three phase</p> <p>LXM05BD10M3X at 200...240 V three phase</p> <p>LXM05CD10M3X at 200...240 V three phase</p> <p>LXM15LD13M3 at 230 V three phase</p> <p>LXM05AD14N4 at 380...480 V three phase</p> <p>LXM05BD14N4 at 380...480 V three phase</p> <p>LXM05CD14N4 at 380...480 V three phase</p> <p>LXM15LD10N4 at 400 V three phase</p>
Shaft end	Keyed
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn
Holding brake	With
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

## Complementary

Range compatibility	<p>Lexium 05</p> <p>Lexium 15</p> <p>Lexium 32</p>
Supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	1.7 A
Maximum continuous power	0.97 W
Maximum current Irms	<p>8.7 A for LXM15LD13M3</p> <p>8.7 A for LXM15LD10N4</p> <p>6.5 A for LXM05AD10M2</p>

6.5 A for LXM05AD10M3X  
 6.5 A for LXM05AD14N4  
 6.5 A for LXM05BD10M2  
 6.5 A for LXM05BD10M3X  
 6.5 A for LXM05BD14N4  
 6.5 A for LXM05CD10M2  
 6.5 A for LXM05CD10M3X  
 6.5 A for LXM05CD14N4  
 6 A for LXM32.U60N4

Maximum permanent current	6.5 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	9 mm
Shaft length	20 mm
Key width	12 mm
Feedback type	Single turn SinCos Hiperface
Holding torque	0.8 N.m holding brake
Motor flange size	55 mm
Number of motor stacks	3
Torque constant	0.7 N.m/A at 120 °C
Back emf constant	41 V/krpm at 120 °C
Number of motor poles	6
Rotor inertia	0.1553 kg.cm <sup>2</sup>
Stator resistance	10.4 Ohm at 20 °C
Stator inductance	25 mH at 20 °C
Stator electrical time constant	2.4 ms at 20 °C
Maximum radial force Fr	190 N at 8000 rpm 200 N at 7000 rpm 210 N at 6000 rpm 230 N at 5000 rpm 240 N at 4000 rpm 270 N at 3000 rpm 310 N at 2000 rpm 390 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	10 W
Type of cooling	Natural convection
Length	203 mm
Centring collar diameter	40 mm
Centring collar depth	2 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	63 mm
Product weight	1.9 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


---

Warranty	18 months
----------	-----------

---

Servo Motors Dimensions

Example with Straight Connectors

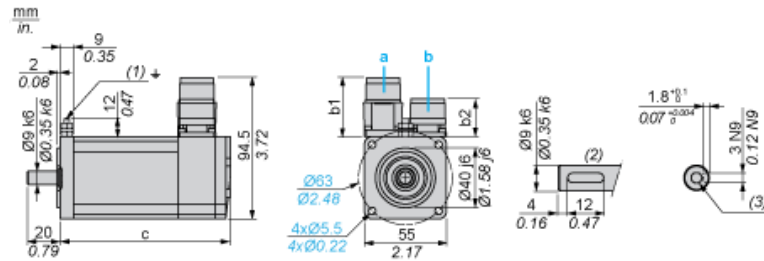

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)
- (3) For screw M3 x 9 mm/M3 x 0.35 in.

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)
b	b1	b	b1		
39.5	25.5	39.5	39.5	176.5	203

Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)
b	b1	b	b1		
1.55	1.00	1.55	1.55	6.94	7.99


---

400 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32-U60N4 servo drive

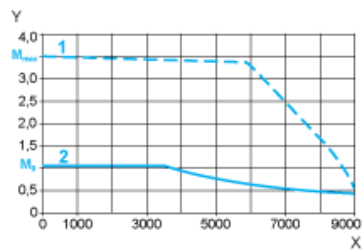

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque


---

480 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32-U60N4 servo drive

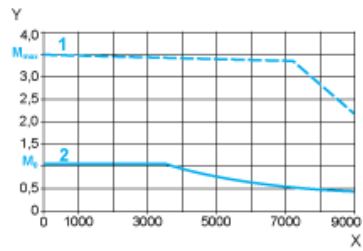

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque