


**Photoelectric sensor
opposed mode sensor (receiver)
TM18RP6R**



- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Metal housing
- Operating voltage: 10...30 VDC
- PNP switching output, dark operation

Wiring diagram




Type code	TM18RP6R
Ident no.	3042011
Operating mode	opposed mode sensor (receiver)
Range	0...20000 mm
Ambient temperature	-40...+70 °C
Operating voltage	10...30VDC
No-load current I ₀	≤ 25 mA
Short-circuit protection	yes/ cyclic
Reverse polarity protection	yes
Output function	NO, dark operation, PNP
Switching frequency	≤ 440 Hz
Readiness delay	≤ 100 ms
Design	cylindrical/threaded, TM18
Dimensions	30 x 30 x 41 mm
Housing material	metal/plastic, CuZn
Lens	plastic, Lexan
Connection	cable
Cable length	2 m
Cable cross section	3 x 0.5 mm ²
Protection class	IP67
Power-on indication	LED green
Switching state	LED yellow
Error indication	LED green flashing
Alarm display	LED yellow flashing

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.


Excess gain curve

Excess gain in relation to the distance

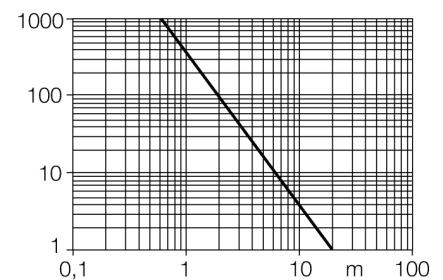

**Photoelectric sensor
opposed mode sensor (receiver)
TM18RP6R**

Accessories

Type code	Ident no.	Description	Dimension drawing
SMBT18Y	3069554	mounting bracket, rectangular, for sensors with 18 mm thread, 15.3 mm cable feedthrough or M12 x 1 male	 <p>Technical drawing of the SMBT18Y mounting bracket. Dimensions include: top width 32, hole diameter $\phi 18,5$, hole offset 4,6, hole diameter $\phi 4,6$, hole offset 25,4, hole diameter $\phi 4,6$, hole offset 7,6, and a radius of R 24,2.</p>
SMB18A	3033200	Mounting bracket, stainless steel, for sensors with 18 mm thread	
SMBAMS18P	3073134	Mounting bracket, stainless steel, for sensors with 18 mm thread	

