

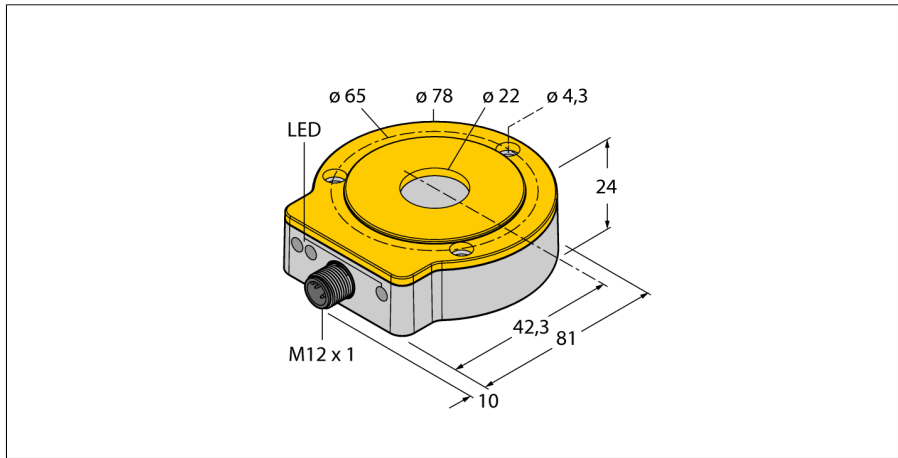


Contactless encoder
Ri360P0-QR24M0-HESG25X3-H1181



- Compact, rugged housing
- Many mounting possibilities
- Status displayed via LED
- Positioning element and aluminium ring not incl.
- SSI output
- 25 bit, Gray-coded
- SSI clock rate: 62.5 KHz ... 1 MHz
- Single or multiturn, length of data frame and bit coding parametrizable via PACTware with programming box USB-2-IOL-0002 and adapter cable RKC8.302T-1,5-RSC4T/TX320
- Default settings: Singleturn Bit 0 ... Bit 15, Multiturn Bit 16 ... Bit 21, Status Bit 22 ... Bit 24
- Zero point, sync./async. operating mode adjustable via Easy Teach
- Compatible with all standard SSI masters
- In sync. mode, jitter < 5 µs required on the master side
- Immune to electromagnetic interference
- 15...30 VDC
- Male M12 x 1, 8-pin

Wiring diagram






Functional principle


The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. Thanks to the innovative technology, electromagnetic AC and DC fields have no effects on the measured signal.

Type code	Ri360P0-QR24M0-HESG25X3-H1181
Ident no.	1590905
Resolution	16 bit
Measuring range	0...360°
Repeatability	≤ 0.01 % of full scale
Linearity deviation	≤ 0.05 %
Temperature drift	≤ ± 0.003 % / K
Ambient temperature	-25...+85 °C
Operating voltage	15...30VDC
Residual ripple	≤ 10 % U _{ss}
Rated insulation voltage	≤ 0.5 kV
Output function	8-wire, SSI, 25 Bit, Gray coded
Output type	absolute multiturn
Resolution single-turn	16 Bit
Resolution multiturn	6 Bit
Process data area	configurable
Diagnostic bits	Bit 22: Position was changed during power drop Bit 23: Positioning element has reached the end of the measuring range. This is indicated by a lower signal quality. Bit 24: Positioning element is outside the measuring range. Data messages parametrizable as multiturn and singleturn process data or error bits
Sample rate	5000 Hz The sensor's sampling rate depends on the master's SSI cycle time. Sampling rate 1...5 KHz in synchronized operating mode (signal propagation delay 200 µs)
Current consumption	< 100 mA
Dimensions	81 x 78 x 24 mm
Shaft type	Hollow shaft
Housing material	metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	male, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance (EN 60068-2-27)	40 g
Continuous shock resistance (EN 60068-2-29)	100 g
Protection class	IP67 / IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED green
Measuring range display	LED, yellow, yellow flashing
Error indication	LED red
Included in scope of supply	MT-QR24, RA0-QR24 mounting aid

Contactless encoder
Ri360P0-QR24M0-HESG25X3-H1181

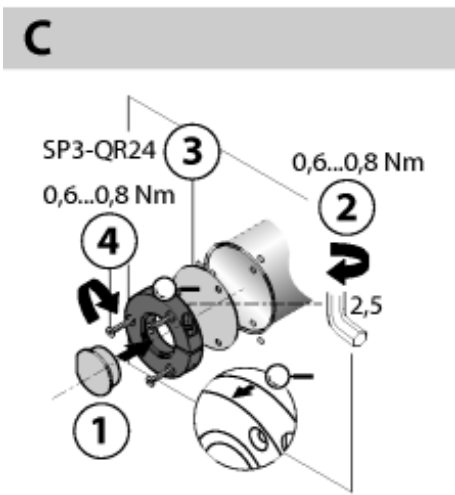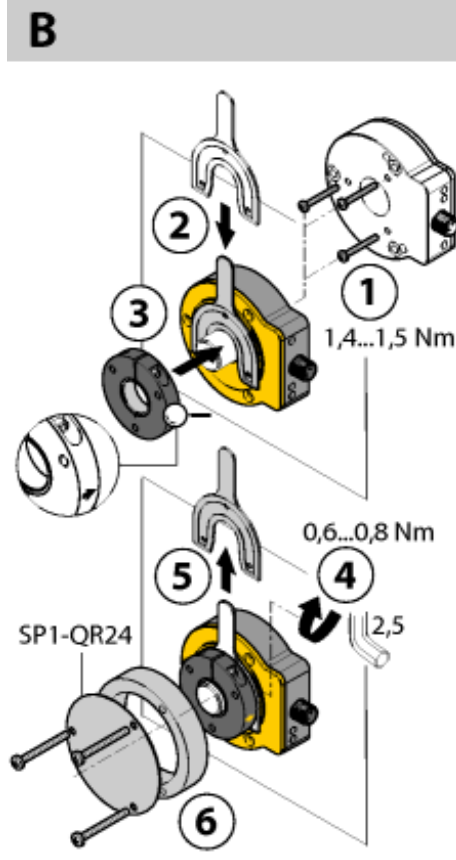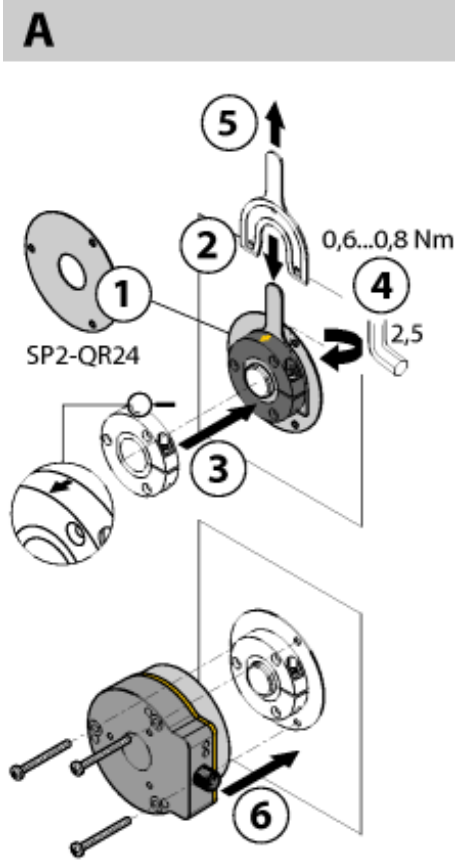

Default: 0°

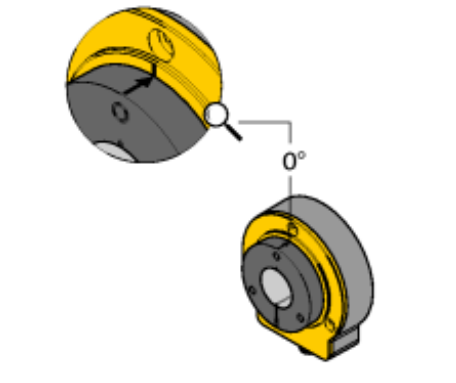

Extensive range of mounting accessories for easy adaptation to many different shaft diameters. Based on the functional principle of RLC coupling, the sensor operates absolutely wear-free and is immune to magnetized metal splinters and other interference fields. Wrong installation is hardly possible.

The adjacent figure shows the two separate units, sensor and positioning element.

Mounting option A:

First, interconnect positioning element and rotatable shaft with the bracket. Then place the encoder above the rotating part in such a way that you get a tight and protected unit.

Mounting option B:

Push the encoder on the back site of the shaft and fasten it to the machine. Then clamp the positioning element to the shaft with the bracket.

Mounting option C:

If the positioning element is to be screwed on a rotating machine part and not on a shaft, install first the dummy plug RA8-QR24. Then tie up the bracket. Screw on the encoder via the three bores.

When mounting, ensure that the positioning element is correctly aligned towards the sensor's active face. The direction of fitting is specified by an arrow on the edge of the positioning element. (Arrow must point in direction of sensor)

The separately arranged sensor and positioning element inhibit that compensating currents or damaging mechanical loads are transmitted via the shaft to the sensor. In addition, the encoder remains tight and highly protected during its entire lifespan.

The accessories enclosed in the delivery help to mount encoder and positioning element at an optimal distance from each other. LEDs indicate the switching status. Optionally, you can use the shield plates which are included in the accessories to increase the allowed distance between positioning element and sensor.

Status display via LED

green steady:

Sensor is supplied correctly

yellow steady:

Positioning element has reached the end of the measuring range. This is indicated by a lower signal quality, see status bit 23.

yellow flashing:

Positioning element is outside the coverage, see status bit 24

off:

Positioning element is in the measuring range

Multiturn error

red:

Position was changed during power drop, see status bit 22

Contactless encoder
Ri360P0-QR24M0-HESG25X3-H1181






parametrization

Parameters	Easy-Teach input	LED	Description
zero point	bridge Pin 1 (GND) and Pin 8 for 2 s	Status LED flashes, after 2 s steady	encoder position set to zero
switching between sync/async mode	bridge Pin 2 (U _s) and Pin 8 for 2 s	Status LED flashes, after 2 s steady power LED steady green: async mode, power LED flashes green: sync mode	async mode is set per default; encoder switches between async/ sync mode by means of a teach pulse
direction mode	bridge Pin 2 (U _s) and Pin 8 for 10 s	after 10 s status LED flashes for 2 s	the encoder rotates in CW direction (default)
	bridge Pin 1 (GND) and Pin 8 for 10 s	after 10 s status LED flashes for 2 s	the encoder rotates in CCW direction
multiturn error- flag	bridge Pin 1 (GND) and Pin 8 for 15 s	after 15 s power and status LED alternate	multiturn error- flag is deleted
Easy-Teach reset	bridge Pin 2 (U _s) and Pin 8 for 15 s	after 15 s power and status LED alternate	the following parameters are reset to factory settings: direction mode (CW), zero point, multiturn error (delete), multiturn counter (zero)

Accessories

Type code	Ident no.	Description	Dimension drawing
P1-Ri-QR24	1590921	Positioning element, for Ø 20 mm shafts	
P2-Ri-QR24	1590922	Positioning element, for Ø 14 mm shafts	
P3-Ri-QR24	1590923	Positioning element, for Ø 12 mm shafts	
P4-Ri-QR24	1590924	Positioning element, for Ø 10 mm shafts	
P5-Ri-QR24	1590925	Positioning element, for Ø 6 mm shafts	

Accessories

Type code	Ident no.	Description	Dimension drawing
P6-Ri-QR24	1590926	Positioning element, for Ø 3/8" shafts	
P7-Ri-QR24	1590927	Positioning element, for Ø 1/4" shafts	
P8-Ri-QR24	1590916	Positioning element, for Ø 12 mm shafts	
M1-QR24	1590920	Aluminium protecting ring, for inductive encoders Ri-QR24	
M2-QR24	1590917	Aluminium protecting ring and shield for inductive encoders Ri-QR24	

Contactless encoder
Ri360P0-QR24M0-HESG25X3-H1181

Accessories

Type code	Ident no.	Description	Dimension drawing
M3-QR24	1590918	Aluminium protecting ring and shield for inductive encoders Ri-QR24	
M4-QR24	1590919	Aluminium protecting ring and shield for inductive encoders Ri-QR24	
PE1-QR24	1590937	Positioning element without adapter sleeve	
RA1-QR24	1590928	Adapter sleeve, for Ø 20 mm shafts	
RA2-QR24	1590929	Adapter sleeve, for Ø 14 mm shafts	

Accessories

Type code	Ident no.	Description	Dimension drawing
RA3-QR24	1590930	Adapter sleeve, for Ø 12 mm shafts	
RA4-QR24	1590931	Adapter sleeve, for Ø 10 mm shafts	
RA5-QR24	1590932	Adapter sleeve, for Ø 6 mm shafts	
RA6-QR24	1590933	Adapter sleeve, for Ø 3/8" shafts	
RA7-QR24	1590934	Adapter sleeve, for Ø 1/4" shafts	

Accessories

Type code	Ident no.	Description	Dimension drawing
RA8-QR24	1590959	Plug for positioning element (alternative to adapter sleeve)	
SP1-QR24	1590938	Shield Ø 74 mm, aluminium	
SP2-QR24	1590939	Shield Ø 74 mm, aluminium, with borehole for shaft feedthrough	
SP3-QR24	1590958	Shield Ø 52 mm, aluminium	
MT-QR24	1590935	Mounting aid for optimal alignment of positioning element	

Contactless encoder
Ri360P0-QR24M0-HESG25X3-H1181



Accessories

Type code	Ident no.	Description	Dimension drawing
TX2-Q20L60	6967117	Teach adapter for inductive encoders with 8-pin male M12 x 1, for simple programming via Easy Teach	
RKC8.302T-1,5-RSC4T/TX320	6625003	Adapter cable to connect sensor to USB-2-IOL-0002 parametrizing unit; female M12, straight, 8-pin on male M12, straight, 3-pin; cable length: 1.5 m; sheath material: PUR, sheath color: black, cULus approved; RoHS conform; protection class IP67	
E-RKC8T-264-2	6611746	Connection cable, female M12, straight, 8-pin (twisted pairs), shielded, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com	