

CONTACTOR,3-POLE,LOW-NOISE,  
AC-3,7.5KW/400V,US=230V 50/60HZ SIZES0,  
SCREW CONNECTION WITH SOLID-STATE CONTROL  
BLOCK WITH VARISTOR,  
DAMPED

### General technical data:

<b>product brand name</b>		SIRIUS
<b>Size of the contactor</b>		S0
<b>Protection class IP / on the front</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature / during operating</b>	°C	-25 ... +60
<b>Mechanical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• of the contactor / typical</li> </ul>		10,000,000
<ul style="list-style-type: none"> <li>• of the contactor with added auxiliary switch block / typical</li> </ul>		10,000,000
<ul style="list-style-type: none"> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		5,000,000

### Main circuit:

<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating current</b>		
<ul style="list-style-type: none"> <li>• at AC-1 / at 400 V <ul style="list-style-type: none"> <li>• at 40 °C ambient temperature / rated value</li> </ul> </li> </ul>	A	40
<ul style="list-style-type: none"> <li>• at AC-3 / at 400 V / rated value</li> </ul>	A	17
<ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>	A	15.5
<ul style="list-style-type: none"> <li>• with 1 current path / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> </ul>	A	35
<ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> </ul>	A	35
<ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> </ul>	A	35
<ul style="list-style-type: none"> <li>• with 1 current path / at DC-3 / at DC-5</li> </ul>	A	35

<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	20
<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	2.5
<ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-3 / at DC-5</li> </ul>		
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	35
<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-3 / at DC-5</li> </ul>		
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	35
<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	35
<b>Service power</b>		
<ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> </ul>	kW	7.5
<ul style="list-style-type: none"> <li>• at AC-3 / at 400 V / rated value</li> </ul>	kW	7.5
<ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>	W	7,500

#### Control circuit:

<b>Design of the surge suppressor</b>		with varistor
<b>Voltage type / of control feed voltage</b>		AC
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• for AC</li> </ul>		0.8 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	6.5
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	8.8
<b>Inductive power factor / with the pull-in power of the coil</b>		0.82
<b>Inductive power factor / with the pull-in power of the coil</b>		0.24

#### Auxiliary circuit:

<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		0
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		0

#### Short-circuit:

<b>Design of the fuse link</b>		
<ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch / required</li> </ul>		fuse gL/gG: 10 A
<ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit</li> </ul>		
<ul style="list-style-type: none"> <li>• with type of assignment 1 / required</li> </ul>		fuse gL/gG: 63 A
<ul style="list-style-type: none"> <li>• at type of coordination 2 / required</li> </ul>		fuse gL/gG: 25 A

#### Installation/mounting/dimensions:

<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<b>series installation</b>		Yes

<b>Width</b>	mm	45
<b>Height</b>	mm	116
<b>Depth</b>	mm	101
<b>Distance, to be maintained, to earthed part / sideways</b>	mm	6

### Connection type:

#### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

#### Type of the connectable conductor cross-section

- for main contacts
  - solid
  - finely stranded
    - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
  - solid
  - finely stranded
    - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>), max. 2x 10 mm<sup>2</sup>

2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>)

2x (20 ... 16), 2x (18 ... 14), 1x 12

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), max. 2x (0.75 ... 4 mm<sup>2</sup>)

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)

2x (20 ... 16), 2x (18 ... 14), 1x 12

### Certificates/approvals:

#### General Product Approval

#### Functional Safety / Safety of Machinery

#### Declaration of Conformity



[Type Examination](#)



EG-Konf.

#### Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

#### Shipping Approval



GL



RINA



RMRS

#### other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RT1025-1XP00-0GA0/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1025-1XP00-0GA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1025-1XP00-0GA0)

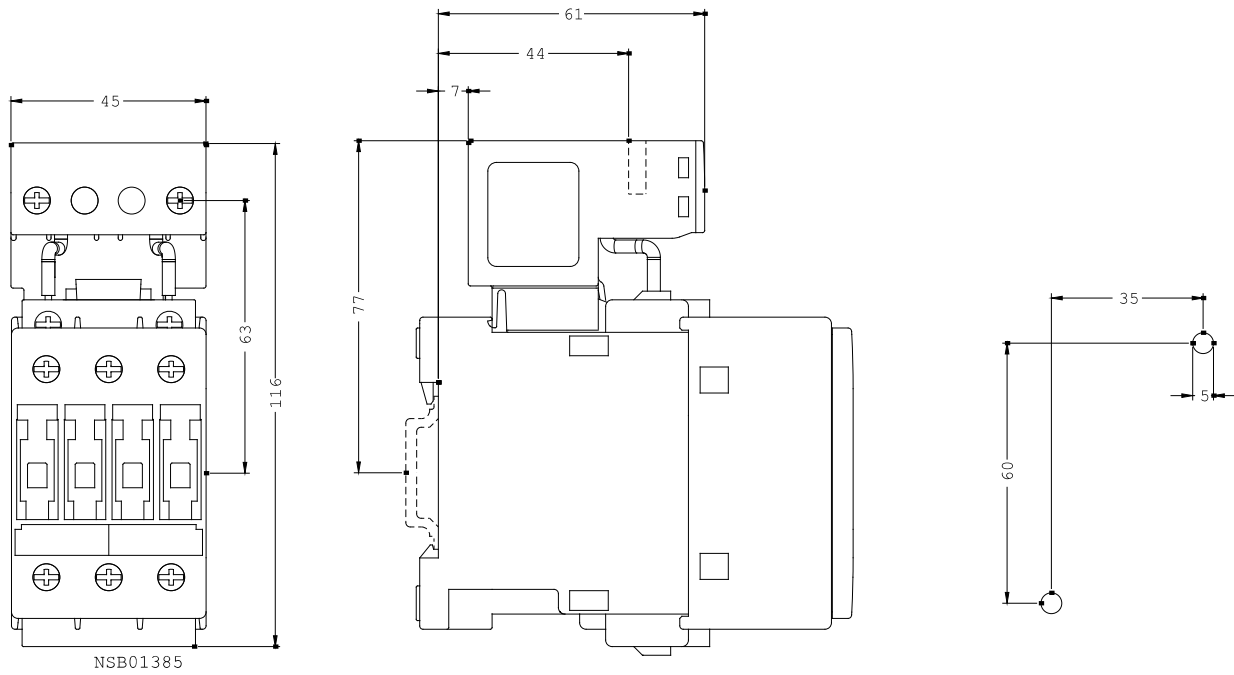

**last change:**

Jul 28, 2014