


Ultrasonic Sensor
Diffuse Mode Sensor
RU20U-Q12S-UN8X-V1141

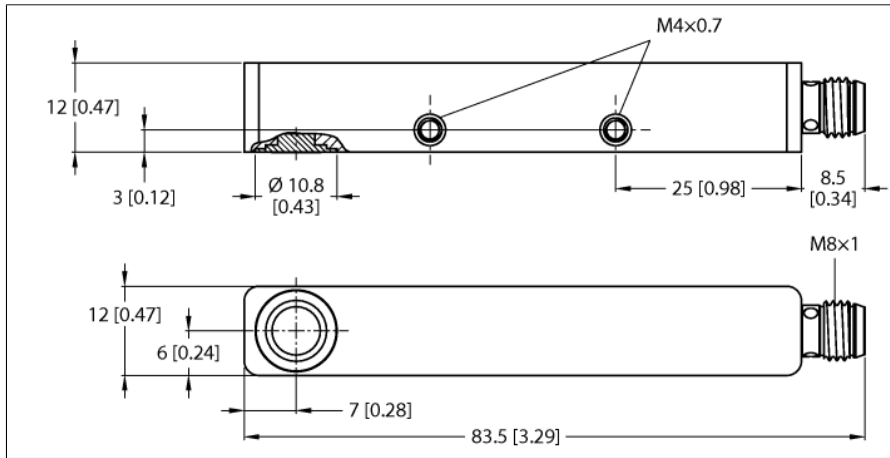

- Smooth sonic transducer face
- Rectangular housing Q12S, potted
- Lateral light emission
- Connection via M8 × 1 male connector
- Teach range adjustable via connection cable or via IO-Link
- Blind zone: 2 cm
- Range: 20 cm
- Resolution: 1 mm
- Aperture angle of sonic cone: 9°
- Switching output, NPN
- NO/NC programmable
- IO-Link


Type designation RU20U-Q12S-UN8X-V1141
Ident-No. 100005606

Function Ultrasonic diffuse mode sensor
Range 20...200 mm
Resolution 1 mm
minimum switching range 5 mm
Ultrasound frequency 300 kHz
Repeat accuracy 0.25 % of full scale
Temperature drift 1% of full scale
Linearity error ≤ ± 0.8 %
Approach speed ≤ 3 m/s
Pass speed ≤ 0.6 m/s

Operating voltage 18...30 VDC
Residual ripple 10 % U_s
No-load current I_0 ≤ 40 mA
Load resistance ≤ 1000 Ω
Residual current ≤ 0.1 mA
Response time typical 100 ms
Readiness delay 300 ms
Communication protocol IO-Link
Output function NO/NC, NPN
Output 1 Switching output or IO-Link mode
Switching frequency 20 Hz
Hysteresis ≤ 2 mm
Voltage drop at I_L ≤ 2 V
Short-circuit protection yes
Reverse polarity protection yes

IO-Link
IO-Link specification V 1.1
IO-Link port type Class A
Communication mode COM 2 (38.4 kBaud)
Process data width 16 bit
Measured value information 15 bit
Switchpoint information 1 bit
Frame type 2.2
Minimum cycle time 2 ms
Function Pin 4 IO-Link
Function Pin 2 DI
Maximum cable length 20 m
Profile support Smart Sensor Profil
Included in the SIDI GSDML Yes

Wiring Diagram

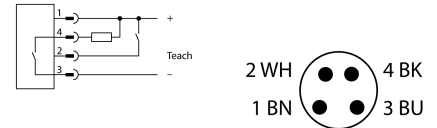


Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.

The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 x 20 mm, 100 x 100 mm) and a round rod with a diameter of 27 mm are used.

Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone

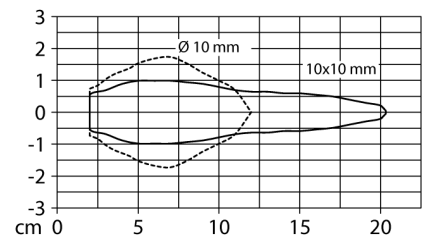


**Ultrasonic Sensor
Diffuse Mode Sensor
RU20U-Q12S-UN8X-V1141**

Design	Rectangular, Q12
Radiation direction	side
Dimensions	82 x 12 x 12 mm
Housing material	Metal, AL, Anodized
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Connector, M8 × 1, 4-wire
Protection class	IP67
Ambient temperature	-10...+70 °C
Storage temperature	-10...+70 °C
Declaration of conformity EN ISO/IEC	EN 60947-5-2
MTTF note	acc. to SN 29500 (Ed. 99) 40 °C

Switching state	LED, Yellow
------------------------	-------------

**Ultrasonic Sensor
Diffuse Mode Sensor
RU20U-Q12S-UN8X-V1141**

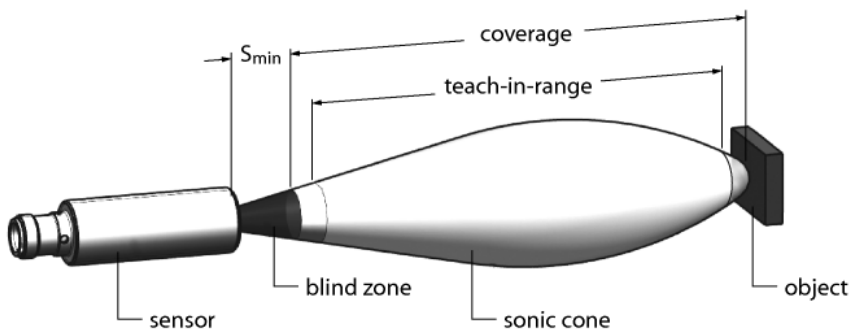

Setting the switchpoint

The ultrasonic sensor features a switching output with a teachable switching point. The yellow LED indicates whether the sensor has detected the object.

One switching point is taught. This must be within the detection range. In this operating mode the background is suppressed.

Teach

- Connect the teach adapter TX1-Q20L60 between the sensor and connection cable
- Position the object at the beginning of the protection area
- Press the button for 2 - 7 sec against Ub
- Place object at the end of the switching range
- Press the button against Ub for 8 - 11 seconds

After a successful teach-in, the yellow LED flashes at 2 Hz and the sensor runs automatically in normal mode.


LED response

In normal operating mode, the LED signals the switching state of the sensor.

- Yellow: Object is within the switching range
- Off: Object is outside the detection range or signal loss

**Ultrasonic Sensor
Diffuse Mode Sensor
RU20U-Q12S-UN8X-V1141**

Function accessories

Type code	Ident-No.	Description	Dimension drawing
TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A	
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port	