



### Main

Range of product	Zelio Control
Product or component type	Industrial measurement and control relays
Relay type	Liquid level control relay
Relay name	RM4-L
Relay monitored parameters	Detection by resistive probes
Time delay	Without
Power consumption	2.4 VA AC
Contacts type and composition	1 C/O

### Complementary

[Un] rated nominal voltage	220...240 V AC 50/60 Hz +/- 5 %
Operating voltage tolerance	0.85...1.1 Uc
Output contacts	1 C/O
Maximum electrode voltage	24 V AC
Maximum electrode current	1 mA
Maximum cable capacity	0 mF
Cable length	<= 100 m
Sensitivity scale	5...100 kOhm
Marking	CE : EMC 89/336/EEC CE : LVD 73/23/EEC
Overvoltage category	III conforming to IEC 60664-1
[Ui] rated insulation voltage	500 V conforming to IEC
Supply disconnection value	> 0.1 Uc
Operating position	Any position without derating
Connections - terminals	Screw terminals 2 x 2.5 mm <sup>2</sup> , flexible cable without cable end Screw terminals 2 x 1.5 mm <sup>2</sup> , flexible cable with cable end
Tightening torque	0.6...1.1 N.m
Mechanical durability	30000000 cycles
[Ith] conventional free air thermal current	8 A
[Ie] rated operational current	0.3 A at 115 V DC-13 70 °C conforming to VDE 0660 0.3 A at 115 V DC-13 70 °C conforming to IEC 60947-5-1/1991 0.1 A at 250 V DC-13 70 °C conforming to VDE 0660 0.1 A at 250 V DC-13 70 °C conforming to IEC 60947-5-1/1991 3 A at 250 V AC-15 70 °C conforming to VDE 0660 3 A at 250 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 24 V AC-15 70 °C conforming to VDE 0660 3 A at 24 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 115 V AC-15 70 °C conforming to VDE 0660 3 A at 115 V AC-15 70 °C conforming to IEC 60947-5-1/1991 2 A at 24 V DC-13 70 °C conforming to VDE 0660 2 A at 24 V DC-13 70 °C conforming to IEC 60947-5-1/1991
Switching capacity in mA	10 mA at 12 V
Switching voltage	250 V AC <= 440 V AC
Contacts material	90/10 silver nickel contacts
Number of cables	2
Width	22.5 mm
Terminals description ISO n°1	(15-16-18)OC (A1-A2)CO (B1-B2-B3)CO

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Output relay state	According to chosen function
9 mm pitches	2.5
Product weight	0.165 kg

## Environment


Standards	EN/IEC 60255-6
Product certifications	CSA GL UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-20...65 °C
Relative humidity	15...85 % 3K3 conforming to IEC 60721-3-3
Vibration resistance	0.35 ms (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
IP degree of protection	IP50 (casing) conforming to IEC 60529 IP20 (terminals) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric test voltage	2.5 kV
Resistance to electrostatic discharge	8 kV air conforming to IEC 61000-4-2 level 3 6 kV contact conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Protection against electric shocks	2 kV : level 3 conforming to IEC 61000-4-5
Disturbance radiated/conducted	CISPR 11 group 1 - class A CISPR 22 - class A

---

Liquid Level Control Relays


---

Dimensions

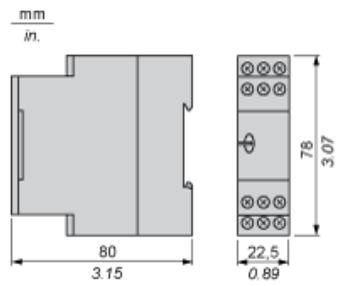


Liquid Level Control Relays

Rail mounting




Screw fixing



Liquid Level Control Relays


RM4LG01 Wiring Diagram



A1- Supply voltage Electrodes (see table below)  
A2,  
B1,  
B2,  
B3  
15-18 C/O contact of the output relay

Electrodes and level controlled	
B1	Reference or tank earth electrode
B2	High level
B3	Low level

RM4LA32 Wiring Diagram




A1- Supply voltage Electrodes (see table below)  
A2,  
B1,  
B2,  
B3  
15-18 C/O contact of the output relay  
25-28 2nd C/O contact of the output relay  
25-26

Electrodes and level controlled	
B1	Reference or tank earth electrode
B2	High level
B3	Low level


Connection Examples

Control by Electrodes

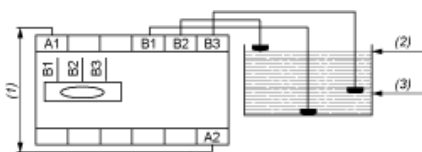

(1) Supply voltage  
(2) High level  
(3) Low level

## Control by Probes

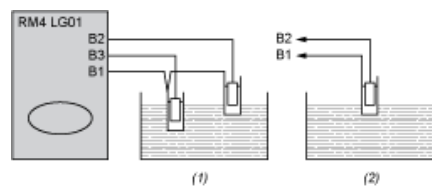


- (1) 2 levels
- (2) 1 level

Electrical Durability and Load Limit Curves


AC Load

Curve 1: Electrical durability of contacts on resistive load in millions of operating cycles



X Current broken in A  
Y Millions of operating cycles


Curve 2: Reduction factor k for inductive loads (applies to values taken from durability Curve 1)




X Power factor on breaking ( $\cos \varphi$ )  
Y Reduction factor K

DC Load

Load limit curve




X Current in A  
Y Voltage in V  
1 L/R = 20 ms  
2 L/R with load protection diode  
3 Resistive load



Function Diagrams

Empty Function

Maximum level detection (2 electrodes or 1 probe LA9RM201)

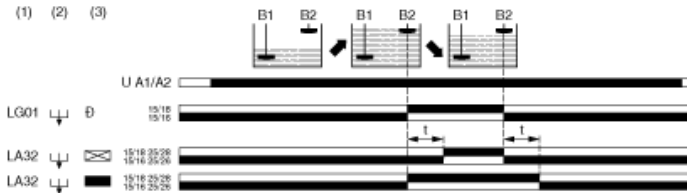


Legend

- U A1/A2 Supply voltage
- B1 Reference electrode
- B2 High/low level electrode

- (1) Type RM4
- (2) Function switch
- (3) Time delay switch
- 15/16, 15/18; 25/26, 25/28 Output relays connections
- Relay status: black color = energized.

Regulation between a maximum and a minimum level (3 electrodes or 2 probes LA9RM201)

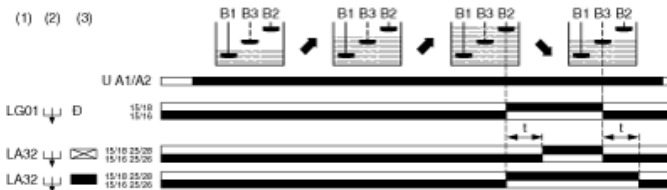

Legend

- U A1/A2 Supply voltage
- B1 Reference electrode
- B2 High level electrode
- B3 Low level electrode
- (1) Type RM4
- (2) Function switch
- (3) Time delay switch
- 15/16, 15/18; 25/26, 25/28 Output relays connections
- Relay status: black color = energized.

Fill Function

Maximum level detection (2 electrodes or 1 probe LA9RM201)




Legend

- U A1/A2 Supply voltage
- B1 Reference electrode
- B2 High/low level electrode

- (1) Type RM4
  - (2) Function switch
  - (3) Time delay switch
- 15/16, 15/18; 25/26, 25/28 Output relays connections  
 Relay status: black color = energized.

Regulation between a maximum and a minimum level (3 electrodes or 2 probes LA9RM201)

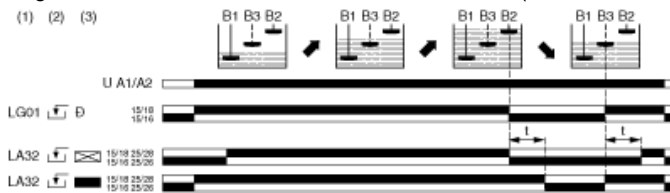

### Legend

- U A1/A2 Supply voltage
  - B1 Reference electrode
  - B2 High level electrode
  - B3 Low level electrode
  - (1) Type RM4
  - (2) Function switch
  - (3) Time delay switch
- 15/16, 15/18; 25/26, 25/28 Output relays connections  
 Relay status: black color = energized.

NOTE: On RM4LA32, a time delay can be set on energization or de-energization of the output relay.