



Main

Range of product	Zelio Control
Product or component type	Industrial measurement and control relays
Relay type	Voltage measurement relay
Relay name	RM4U
Relay monitored parameters	Overvoltage or undervoltage detection
Time delay	Without
Power consumption in VA	1.9...3.3 VA AC
Measurement range	5...50 V voltage DC 10...100 V voltage DC 1...10 V voltage DC <= 80 ms cycle 5...50 V voltage AC 50/60 Hz 10...100 V voltage AC 50/60 Hz 1...10 V voltage AC 50/60 Hz
Contacts type and composition	1 C/O

Complementary

[Us] rated supply voltage	110...130 V AC, 50/60 Hz +/- 5 %
Output contacts	1 C/O
Internal input resistance	112000 Ohm 225000 Ohm 23000 Ohm
Permissible continuous overload	150 V 300 V 90 V
Permissible non repetitive overload	400 A for <= 1 s 200 A for <= 1 s 100 A for <= 1 s
Setting accuracy of the switching threshold	+/- 5 %
Switching threshold drift	<= 0.5 % within the supply voltage range (0.85...1.1 Un) <= 0.06 % per degree centigrade depending permissible ambient air temperature
Setting accuracy of time delay	10 P
Hysteresis	5...30 % adjustable of voltage threshold setting
Quality labels	CE
Overvoltage category	III conforming to IEC 60664-1
[Ui] rated insulation voltage	500 V conforming to IEC
Operating voltage tolerance	0.85...1.1 Uc
Supply disconnection value	> 0.1 Uc
Operating position	Any position without derating
Connections - terminals	Screw terminals 2 x 2.5 mm ² , flexible cable without cable end Screw terminals 2 x 1.5 mm ² , flexible cable with cable end
Tightening torque	0.6...1.1 N.m
Mechanical durability	<= 30000000 cycles
[Ith] conventional free air thermal current	8 A

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


[Ie] rated operational current	0.3 A at 115 V DC-13 70 °C conforming to VDE 0660 0.3 A at 115 V DC-13 70 °C conforming to IEC 60947-5-1/1991 0.1 A at 250 V DC-13 70 °C conforming to VDE 0660 0.1 A at 250 V DC-13 70 °C conforming to IEC 60947-5-1/1991 3 A at 250 V AC-15 70 °C conforming to VDE 0660 3 A at 250 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 24 V AC-15 70 °C conforming to VDE 0660 3 A at 24 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 115 V AC-15 70 °C conforming to VDE 0660 3 A at 115 V AC-15 70 °C conforming to IEC 60947-5-1/1991 2 A at 24 V DC-13 70 °C conforming to VDE 0660 2 A at 24 V DC-13 70 °C conforming to IEC 60947-5-1/1991
Switching capacity in mA	10 mA at 12 V
Switching voltage	250 V AC <= 440 V AC
Contacts material	90/10 silver nickel contacts
Number of cables	2
Height	78 mm
Width	22.5 mm
Depth	80 mm
Terminals description ISO n°1	(15-16-18)OC (A1-A2)CO (C-B1-B2-B3)CO
Output relay state	Tripped if A measured > A set
9 mm pitches	2.5
Product weight	0.168 kg

Environment

Standards	EN/IEC 60255-6
Product certifications	CSA GL UL
Directives	89/336/EEC - electromagnetic compatibility 73/23/EEC - low voltage directive
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-20...65 °C
Relative humidity	15...85 % 3K3 conforming to IEC 60721-3-3
Vibration resistance	0.35 ms (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
IP degree of protection	IP50 (casing) conforming to IEC 60529 IP20 (terminals) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric test voltage	2.5 kV
Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	8 kV air conforming to IEC 61000-4-2 level 3 6 kV contact conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Protection against electric shocks	2 kV : level 3 conforming to IEC 61000-4-5
Disturbance radiated/conducted	CISPR 11 group 1 - class A CISPR 22 - class A


Voltage Measurement Relays

Dimensions




Voltage Measurement Relays

Rail mounting




Screw fixing



Voltage Measurement Relays


RM4UA01 and RM4UA02 Wiring Diagram



- A1- Supply voltage
- A2
- B1, Voltages to be measured (see table below)
- B2,
- B3, C

Connection and current values to be measured		
RM4UA•1	B1-C	0.05...0.5 V
B2-C	0.3...3 V	
B3-C	0.5...5 V	
RM4UA•2	B1-C	1...10 V
B2-C	5...50 V	
B3-C	10...100 V	


RM4UA03 Wiring Diagram



- A1- Supply voltage
- A2
- B2, Voltages to be measured (see table below)
- B3, C

Connection and current values to be measured	
B2-C	30...300 V
B3-C	50...500 V

RM4UA31 and RM4UA32 Wiring Diagram




- A1- Supply voltage
- A2
- B1, Voltages to be measured (see table below)
- B2,
- B3, C

Connection and current values to be measured		
RM4UA•1	B1-C	0.05...0.5 V
B2-C	0.3...3 V	

Connection and current values to be measured		
B3-C	0.5...5 V	
RM4UA*2	B1-C	1...10 V
B2-C	5...50 V	
B3-C	10...100 V	

RM4UA33 Wiring Diagram



A1- Supply voltage

A2

B2, Voltages to be measured (see table below)


B3, C

Connection and current values to be measured	
B2-C	30...300 V
B3-C	50...500 V

Voltage Measurement Relays

Application Scheme

Example: overspeed monitoring (undervoltage function)

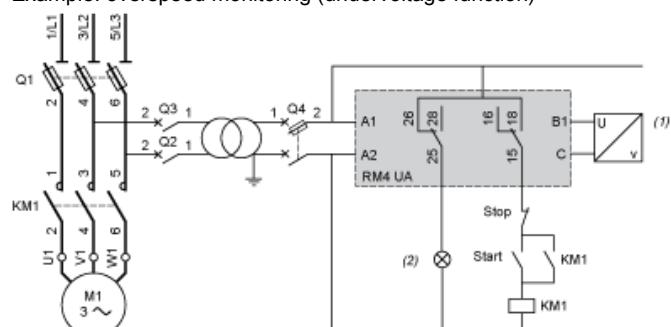


(1) Tachogenerator

(2) Overspeed

Electrical Durability and Load Limit Curves


AC Load

Curve 1: Electrical durability of contacts on resistive load in millions of operating cycles



X Current broken in A
Y Millions of operating cycles


Curve 2: Reduction factor k for inductive loads (applies to values taken from durability Curve 1)




X Power factor on breaking ($\cos \varphi$)
Y Reduction factor K

DC Load

Load limit curve




X Current in A
Y Voltage in V
1 L/R = 20 ms
2 L/R with load protection diode
3 Resistive load



Function Diagram

Overvoltage Control

Function ">"



Legend

t Time delay

U A1-A2 Supply voltage

US1 Setting voltage threshold

US2 Voltage measured

15-18, 15-16; 25-28, 25-26 Output relays connections

Relay status: black color = energized.