



Main

Range of product	Interface for discrete signals
Product or component type	Slim electromechanical input interface module
Contacts type and composition	1 NO
[Uc] control circuit voltage	48 V
Control circuit type	DC
Width pitch dimension	9.5 mm
[In] rated current	<= 0.011 A
Reverse polarity protection	Internal for control circuit
Short circuit protection	2 A external fuse fast blow
[Ith] conventional free air thermal current	1 A conforming to IEC 60947-1
Local signalling	1 LED indicating control signal state
Quantity per set	Set of 5

Complementary

Control voltage limits	57.6 V
Connections - terminals	Screw clamp terminal
Operating threshold	37.3 V
Drop-out voltage	<= 8.5 V
Holding current	2 mA
Power dissipation in W	0.52 W
Maximum switching voltage	140 V AC 125 V DC
[Ue] rated operational voltage	<= 127 V AC conforming to IEC 60947-5-1 for built-in contacts <= 100 V DC conforming to IEC 60947-5-1 for built-in contacts
Network frequency	50/60 Hz
[Ie] rated operational current	0.5 A AC-15 Ue: 127 V per 1000000 cycles conforming to IEC 60947-5-1 0.5 A AC-14 Ue: 127 V per 1000000 cycles conforming to IEC 60947-5-1 1 A DC-13 Ue: 24 V per 1000000 cycles conforming to IEC 60947-5-1 1 A DC-12 Ue: 24 V per 1000000 cycles conforming to IEC 60947-5-1 1 A AC-12 Ue: 127 V per 1000000 cycles conforming to IEC 60947-5-1
Minimum switching current	1 mA
Minimum switching voltage	5 V
Electrical reliability	1e-008
Operating time	<= 6 ms between de-energisation of coil and closing of NO contact DC <= 10 ms between energisation of coil and closing of NO contact DC
Contact bounce time	<= 5 ms
Operating rate in Hz	0.5 Hz at Ie 10 Hz at no-load
Mechanical durability	>= 20000000 cycles
[Ui] rated insulation voltage	300 V conforming to IEC 60947-1 250 V conforming to VDE 0110 group C
Flame retardance	V0 conforming to UL 94
Cable cross section	0.6...2.5 mm ² , 1 or 2 wires flexible without cable end 0.34...2.5 mm ² , 1 or 2 wires flexible with cable end 0.27...4 mm ² , 1 wire rigid
Operating position	Any position
Installation category	II conforming to IEC 60947-1

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Mounting support	Asymmetrical DIN rail Combination rail Symmetrical DIN rail
Product weight	0.032 kg

Environment

Immunity to microbreaks	1 ms
Dielectric strength	750 V between open contacts 2500 V between wired interface and earth 2000 V between coil circuit and contact circuits
Standards	IEC 60947-5-1
Product certifications	BV CSA DNV LROS (Lloyds register of shipping) UL
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TC
Fire resistance	960 °C conforming to IEC 60695-2-1
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	3 gn (f = 10...150 Hz) conforming to IEC 60068-2-6
Electromagnetic compatibility	Rapid transients immunity test level 3, on power supply 2 kV conforming to IEC 61000-4-4 Rapid transients immunity test level 3, on input/output 1 kV conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3, 8 kV conforming to IEC 61000-4-2 Electromagnetic field immunity test level 3, 10 V/m between 27...1000 MHz conforming to IEC 61000-4-3 1.2/50 µs shock waves immunity test, 2.5 kV for U < 300 V conforming to IEC 947-1 1.2/50 µs shock waves immunity test, 1.5 kV for U < 150 V conforming to IEC 947-1 1.2/50 µs shock waves immunity test, 0.5 kV for U < 50 V conforming to IEC 947-1
Ambient air temperature for operation	-5...55 °C from 0.85...1.1 Us -5...40 °C unrestricted operation -25...70 °C at Us
Ambient air temperature for storage	-40...80 °C
Operating altitude	<= 3000 m
Pollution degree	2 conforming to IEC 60947-1

Slim Electromechanical Interface Module


Dimensions

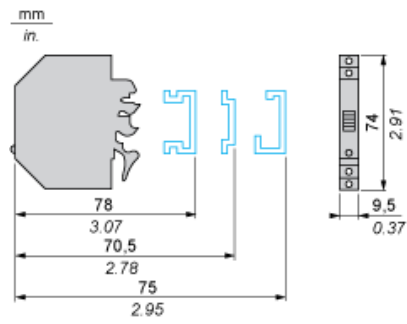

Slim Electromechanical Interface Module

Example of Application with PLC

Interfacing PLC discrete inputs

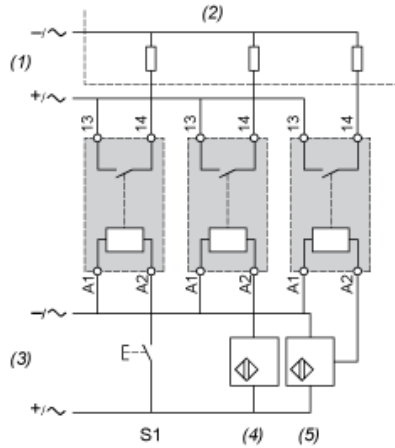

ABR 2E****

- S1 Pushbuttons series contacts
- (1) Processing power supply
- (2) PLC positive logic discrete inputs
- (3) Process power supply
- (4) 2-wire sensors
- (5) 3-wire sensors

Slim Electromechanical Interface Module

Circuit Diagram

1 N/O

