



## Main

Range of product	Interface for discrete signals
Product or component type	Slim solid state input interface module
Contacts type and composition	1 NC
[Uc] control circuit voltage	230...240 V
Control circuit type	AC
Control circuit frequency	50 Hz
[In] rated current	<= 12.5 mA
Reverse polarity protection	Internal for output circuit
Short circuit protection	0.25 A external fuse fast blow (Ik <= 100 A DC)
Local signalling	1 LED indicating control signal state
Sale per indivisible quantity	5
Width pitch dimension	9.5 mm

## Complementary

Control voltage limits	264 V
Voltage state 1 guaranteed	173 V
Current state 1 guaranteed	7.9 mA
Voltage state 0 guaranteed	48 V
Current state 0 guaranteed	2.5 mA
[Ue] rated operational voltage	5...48 V
Output circuit type	DC
Rated operational voltage limits	2...60 V
Maximum switching current	50 mA
Minimum switching current	1 mA
Residual current	0.1 mA at state 0
Drop-out voltage	<= 1 V at state 1
Response time	<= 20 ms from state 1 to state 0 <= 10 ms from state 0 to state 1
Switching frequency	<= 25 Hz 50 %
[Ui] rated insulation voltage	300 V conforming to IEC 60947-1 250 V conforming to VDE 0110 group C
Connections - terminals	Screw clamp terminal
Flame retardance	V0 conforming to UL 94
Cable cross section	0.6...2.5 mm <sup>2</sup> , 1 or 2 wires flexible without cable end 0.34...2.5 mm <sup>2</sup> , 1 or 2 wires flexible with cable end 0.27...4 mm <sup>2</sup> , 1 wire rigid
Operating position	Any position
Installation category	II conforming to IEC 60947-1
Mounting support	Asymmetrical DIN rail Combination rail Symmetrical DIN rail
Product weight	0.033 kg


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Dielectric strength	4000 V between I/O for 1 minute 2500 V between wired interface and earth for 1 minute
Standards	IEC 60947-5-1
Product certifications	BV CSA DNV LROS (Lloyds register of shipping) UL
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TC
Fire resistance	960 °C conforming to IEC 60695-2-1
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	5 gn (f = 10...150 Hz) conforming to IEC 68-2-6
Electromagnetic compatibility	Fast transients immunity test level 3, on power supply 2 kV conforming to IEC 61000-4-4 Fast transients immunity test level 3, on input/output 1 kV conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3, 8 kV conforming to IEC 61000-4-2 Electromagnetic field immunity test level 3, 10 V/m between 27...1000 MHz conforming to IEC 61000-4-3 1.2/50 µs shock waves immunity test, 2.5 kV for U < 300 V conforming to IEC 60947-1 1.2/50 µs shock waves immunity test, 1.5 kV for U < 150 V conforming to IEC 60947-1 1.2/50 µs shock waves immunity test, 0.5 kV for U < 50 V conforming to IEC 60947-1
Ambient air temperature for operation	-5...55 °C unrestricted operation -25...70 °C at Us
Ambient air temperature for storage	-40...80 °C
Operating altitude	<= 300 m
Pollution degree	2 conforming to IEC 60947-1

Slim Solid-State Interface Module


Dimensions

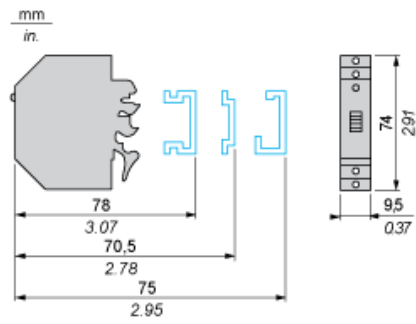

Slim Solid-State Interface Module

Example of Application with PLC


Interfacing PLC discrete inputs

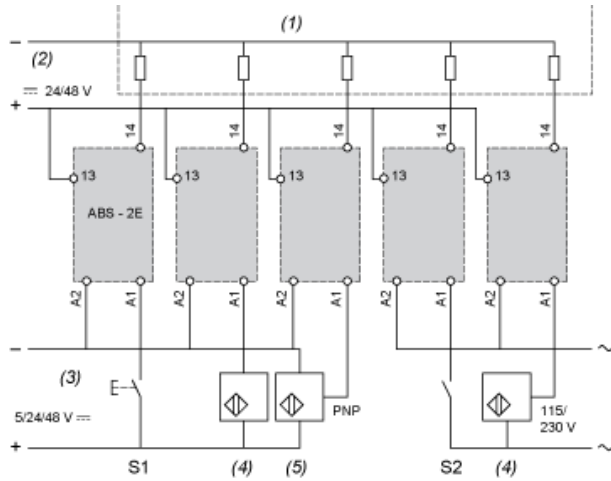

- S1, Pushbuttons series contacts
- S2
- (1) PLC positive logic discrete inputs
- (2) Processing power supply
- (3) Process power supply
- (4) 2-wire sensors
- (5) 3-wire sensors

Solid-State Input Module

Circuit Diagram



Wiring Diagram

