

Main

Range of product	Harmony 9001K Harmony 9001SK
Product or component type	Light block
Device short name	9001K
Light block supply	Direct

Complementary

Product weight	0.115 kg
Light source	Incandescent
[Us] rated supply voltage	110...120 V AC/DC


Environment

Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
IP degree of protection	IP20 conforming to IEC 60529
Standards	CSA C22-2 No 14 EN/IEC 60947-1 EN/IEC 60947-5-1 EN/IEC 60947-5-4 JIS C 4520 JIS C 852 UL 508
Product certifications	NEMA UL 508
Class of protection against electric shock	Class II conforming to IEC 61140
Vibration resistance	7 gn (f = 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn conforming to IEC 60068-2-27

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0921 - Schneider Electric declaration of conformity download declaration of conformity

Dimensions

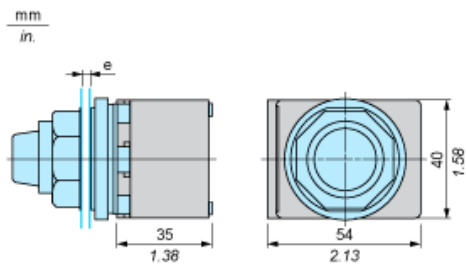

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.