


PRODUCT-DETAILS

M63/2 JFB

Modular Combi 63 A, M63/2 JFB, Metal

(Enclosure of aluminium with fronts of galvanised steel) One 16A, 32A and one 63A (346-415V) outlet (3P+N+E) MCB three S201 C10, one S203 C16, one S203 C32 and one S203 C63 Four single schuko outlet (1P+E) 10/16A (250 V) RCD F204 A-63/0,03

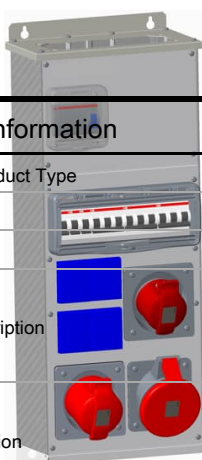

General Information

Extended Product Type	M63/2 JFB
Product ID	2CMA179353R1000
EAN	7392696793537
Catalog Description	Modular Combi 63 A, M63/2 JFB, Metal (Enclosure of aluminium with fronts of galvanised steel) One 16A, 32A and one 63A (346-415V) outlet (3P+N+E) MCB three S201 C10, one S203 C16, one S203 C32 and one S203 C63 Four single schuko outlet (1P+E) 10/16A (250 V) RCD F204 A-63/0,03
Long Description	Modular Combi Metal, (Enclosure of aluminium with fronts of galvanised steel) One 16A, 32A and one 63A (346-415V) outlet (3P+N+E) MCB three S201 C10, one S203 C16, one S203 C32 and one S203 C63 Four single schuko outlet (2P+E) 10/16A (250 V) RCD F204 A-63/0,03

Ordering

E-Number (Sweden)	E2466355
E-Number (Finland)	3405164
E-Number (Norway)	2466355
EAN	7392696793537
Country of Origin	Czech Republic (CZ)
Minimum Order Quantity	1 piece

Dimensions

Product Net Width	250 mm
Product Net Height	704 mm
Product Net Weight	9.55 kg

Container Information

Package Level 1 Width	210 mm
Package Level 1 Depth / Length	270 mm
Package Level 1 Height	750 mm
Package Level 1 Gross Weight	9.55 kg
Package Level 1 EAN	7392696793537
Package Level 1 Units	box 1 piece
Package Level 2 Width	800 mm
Package Level 2 Depth / Length	1200 mm
Package Level 2 Height	900 mm
Package Level 2 Gross Weight	134.6 kg
Package Level 2 EAN	7392696078740
Package Level 2 Units	pallet (lift) 12 piece

Environmental

RoHS Status	Following EU Directive 2011/65/EU
-------------	-----------------------------------

Certificates and Declarations (Document Number)

Declaration of Conformity - CE	2CMC700005D0004
Environmental Information	2CMC000057M0000
RoHS Information	2CMC700005D0004
REACH Declaration	2CMC700005D0004

Additional Information

Additional Information	Cable entry, FL21 flange openings at top and bottom, Incoming terminal 35 mm ² / AWG 2
Ambient Temperature	-25 ... 40 °C
Cable Cross-Section	16 mm ²
Cable Entry Position	Cable entry, FL21 flange openings at top and bottom
Cable Length	0 m
Color	Grey
Connection Type	Screw Clamp
Degree of Protection	IP44
Frequency (f)	50 Hz

	60 Hz
Function	Combination box
Housing Material	Steel
Invoice Description	Ind. P&S#M63/2 JFB
Mounting Holes	628x200
Mounting Type	Wall mounting
Number of Poles	5
Number of RCDs 30mA	1
Number of RCDs	1
Number of Schuko Outlets	4
Order Multiple	1 piece
Product Main Type	M
Product Name	Modular Combi
Rated Current (I_n)	63 A
Rated Residual Current	30 mA
Rated Voltage (U_r)	346 ... 415 V
Recommended Screw Driver	PH2
Standards	IEC 61439-1 IEC 61439-2
Sub-Function	Cable entry, FL21 flange openings at top and bottom
Suitable For	M63/2 JFB
Suitable for Product Class	IEC Industrial Plugs and Sockets
Instructions and Manuals	2CMC711001M0201
Installation Manual	2CMC711001M0201
RAL Number	RAL 9007 - Grey Aluminium

Classifications

eClass	27440501
UNSPSC	39121406

Categories

Low Voltage Products and Systems → Industrial Plugs and Sockets → Modular Combination Boxes

