



Main

| | |
|-----------------------------|--|
| Range of product | Harmony XAC |
| Product or component type | Pendant control station |
| Control station name | XACB |
| Control station type | Double insulated |
| Enclosure material | Glass reinforced polyester |
| Electrical circuit type | Power circuit |
| Enclosure type | Complete ready for use |
| Control station application | Control of single speed hoist motor |
| Control station composition | 6 pushbuttons |
| Control button type | Sixth push-button, 2-pole reverse, slow Fifth push-button, 2-pole forward slow Third push-button, 2-pole right, slow Fourth push-button, 2-pole left, slow Second push-button, 2-pole lower, slow First push-button, 2-pole raise, slow |
| Contact block name | XESD1191 for reversing operation |
| Mechanical interlocking | With mechanical interlocking between pairs |

Complementary

| | |
|--|--|
| Control station colour | Yellow |
| Connections - terminals | Screw clamp terminals, connection capacity: 2 x 1.5 mm ² with or without cable end Screw clamp terminals, connection capacity: 1 x 2.5 mm ² with or without cable end |
| Mechanical durability | 1000000 cycles |
| Cable entry | Rubber sleeve with stepped entry, cable outer diameter: 10...22 mm |
| [I _{th}] conventional enclosed thermal current | 12 A |
| [U _i] rated insulation voltage | 600 V conforming to CSA 500 V (degree of pollution: 3) conforming to IEC 60947-1 |
| [U _{imp}] rated impulse withstand voltage | 6 kV conforming to IEC 60947-1 |
| Contacts operation | Snap action |
| Operating force | 17 N for push-button |
| Short circuit protection | ≤ 10 A fuse protection by cartridge fuse type aM |
| Rated power in hp | 5 hp at 400 V, CSA certified 3 hp at 600 V, CSA certified 2 hp at 240 V, CSA certified |
| Rated operational power in W | 2200 W AC-4 at 400 V conforming to IEC 60947-3 appendix A 2200 W AC-4 at 240 V conforming to IEC 60947-3 appendix A 2200 W AC-3 at 400 V conforming to IEC 60947-3 appendix A 2200 W AC-3 at 240 V conforming to IEC 60947-3 appendix A |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


| | |
|-------------------------------|--|
| Electrical durability | 800000 cycles AC-4, 1500 W at 400 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 800000 cycles AC-3, 1500 W at 400 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 500000 cycles AC-4, 1500 W at 240 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 500000 cycles AC-3, 1500 W at 240 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 300000 cycles AC-4, 2200 W at 400 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 300000 cycles AC-4, 2200 W at 240 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 300000 cycles AC-3, 2200 W at 400 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 300000 cycles AC-3, 2200 W at 240 V, operating rate = 10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A |
| Terminals description ISO n°1 | (13-14)NO (23-24)NO (33-34)NO (43-44)NO |
| Terminal identifier | (11-12)NC (13-14)NO |
| Product weight | 1.35 kg |

Environment

| | |
|--|--|
| Standards | EN/IEC 60204-32 EN/IEC 60947-5-1 UL 508 CSA C22.2 No 14 |
| Product certifications | CSA type 4 |
| Protective treatment | TH |
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -40...70 °C |
| Vibration resistance | 15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 100 gn conforming to IEC 60068-2-27 |
| Class of protection against electric shock | Class II conforming to IEC 61140 |
| IP degree of protection | IP65 conforming to IEC 60529 |

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

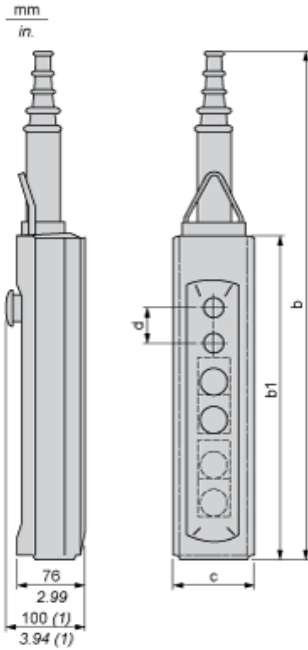

(1) With mushroom head operator


Dimensions in mm

| Number of cut-outs | 2 | 4 | 6 | 8 | 12 |
|--------------------|-----|-----|-----|-----|-----|
| b | 409 | 499 | 589 | 679 | 679 |
| b1 | 220 | 310 | 400 | 490 | 490 |
| c | 98 | 98 | 98 | 98 | 98 |
| d | 40 | 40 | 40 | 40 | 30 |

Dimensions in in.

| Number of cut-outs | 2 | 4 | 6 | 8 | 12 |
|--------------------|-------|-------|-------|-------|-------|
| b | 16.10 | 19.64 | 23.19 | 26.73 | 26.73 |
| b1 | 8.66 | 12.20 | 15.75 | 19.29 | 19.29 |
| c | 3.86 | 3.86 | 3.86 | 3.86 | 3.86 |
| d | 1.57 | 1.57 | 1.57 | 1.57 | 1.18 |

Protective cable sleeves



(1) Internal ø