



WIRE CONNECTOR 4 CABLES 3 PCS. ACCESSORY FOR: 3VA15/25 1000

| Model | |
|--|----------------------------|
| product brand name | SETRON |
| product designation | accessories |
| Product version | 'wire connector |
| Accessories | Wire connector |
| General technical data | |
| designation / of the terminal | TA4.3 |
| Connections according IEC | |
| connectable conductor cross-section | |
| • for copper cable / stranded / minimum | 120 mm ² |
| • for copper cable / stranded / maximum | 240 mm ² |
| • for aluminum cable / stranded / minimum | 120 mm ² |
| • for aluminum cable / stranded / maximum | 240 mm ² |
| stripped length | 23.1 44.5 |
| Connections according UL | |
| permissible temperature / of connectable conductor / according to UL 486A-486B | 90 °C |
| connectable conductor cross-section | |
| • for copper cable / stranded / minimum | 4/0 |
| • for copper cable / stranded / maximum | 500 |
| • for copper cable / finely stranded / minimum | 4/0 |
| • for copper cable / finely stranded / maximum | 500 |
| • for aluminum cable / stranded / minimum | 4/0 |
| • for aluminum cable / stranded / maximum | 500 |
| tightening torque / when using copper cables | |
| • stranded | 4/0 - 500 kcmil: 325 lb-in |
| • finely stranded | 4/0 - 500 kcmil: 325 lb-in |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9603-0JJ43>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9603-0JJ43>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9603-0JJ43

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

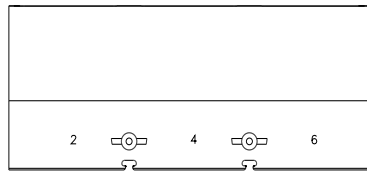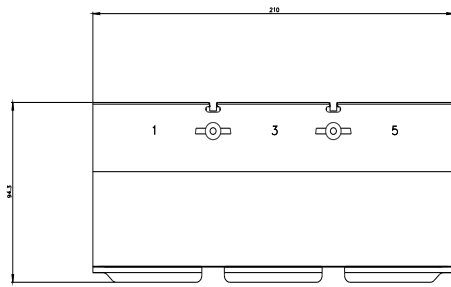

last modified:

4/6/2021 

