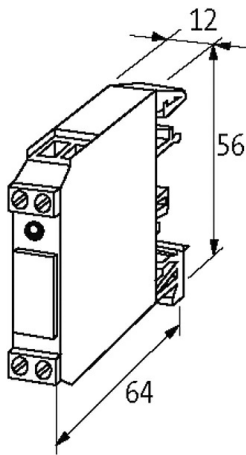
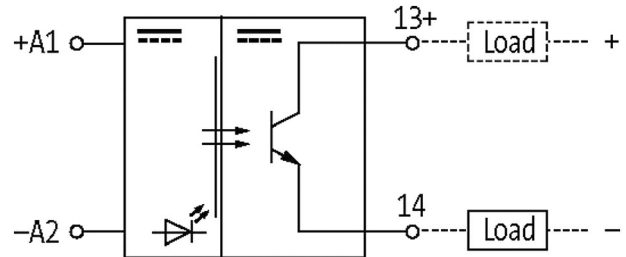


**AMMS 10-14/1 OPTO-COUPLER MODULE**

IN: 5,5 VDC - OUT: 53 VDC / 1,2 A

Transistor 1.2 A  
3.5...5.5 V DC[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	56x12x64 mm

**Output**

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	100/700 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	4.5...53 V DC
Switching frequency	max. 500 Hz (resist.) at max. 0.2 A/max. 30 Hz (ind.)
Switching current per output	1 mA...1.2 A

Input	
Voltage range OFF	0...0.8 V DC
Voltage range ON	3.5...5.5 V DC
LED display	LED (red)
Input current	6 mA

Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879028042
eClass	27371604
Packaging unit	1.000