

M12 male 0° field-wireable4-pole max. 0.75mm² 4-6mm

Male straight

M12, 4-pole

Screw terminal

Connection cross section



max. 0.75 mm²

Please use wire end ferrule.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

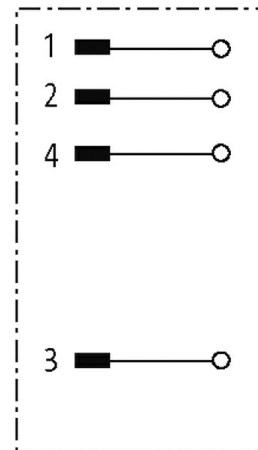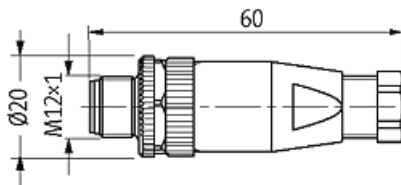

Product may differ from Image

**Technical Data**

Operating voltage	max. 250 V AC/DC
Rated surge voltage	2.5 kV
Operating current per contact	max. 4 A; max. 3 A (UL-Recognized)

No. of poles	4
Material group	IEC 60664-1, category III
Coding	A-coded
LED display	no
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	4...6 mm
Reconnection (cable)	10
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	pluggable, screw locking / M12 (A/F18) / zinc-pressure die casting, surface Ni
Protection	IP67 mounted and tightened
Housing	PA

General data

Standards	DIN EN 61076-2-101 (M12)
Material (contact)	Copper alloy
Material (contact surface)	Copper alloy
Pollution Degree	3
Temperature range	-40...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879848688
eClass	27279221
Packaging unit	10