

M12 MALE ON TOP OF MSUD VALVE PLUG FORM BI 11MM

Form BI (11 mm) – M12, connector top entry

24 V AC/DC $\pm 25\%$

LED


3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.



[Link to Product](#)

Illustration

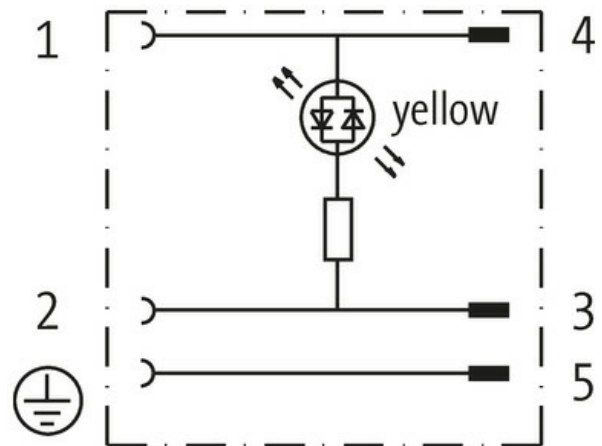

Female

Male

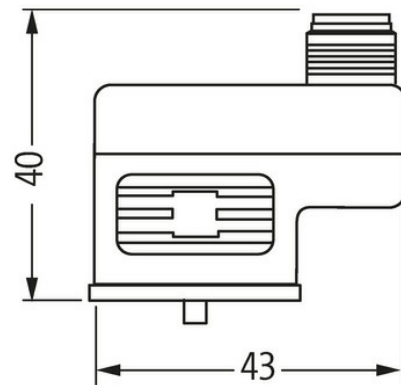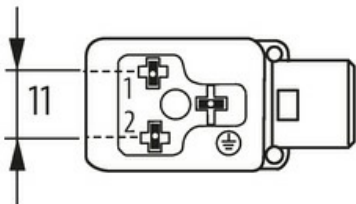

Depth: 22 mm

Product may differ from Image



Form

Form 42001

Technical Data

Operating voltage	24 V AC/DC $\pm 25\%$
Operating current per contact	max. 4 A
Locking of ports	M3/M12 \times 1 mm (recommended torque 0.4/0.6 Nm)

Protection	IP67 inserted and tightened (EN 60529)
Configuration	2 contacts + PE

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	CZ
customs tariff number	85389099
EAN	4048879143318
eClass	27143423
Packaging unit	1.000