



MET SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:500VA IN:220...530VAC±20VAC OUT:230VAC

Single-phase safety transformer
500 VA
Isolation class T 60/B
Other voltages on request.

[Link to Product](#)

Illustration

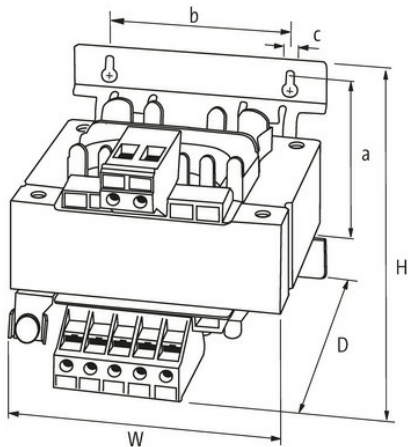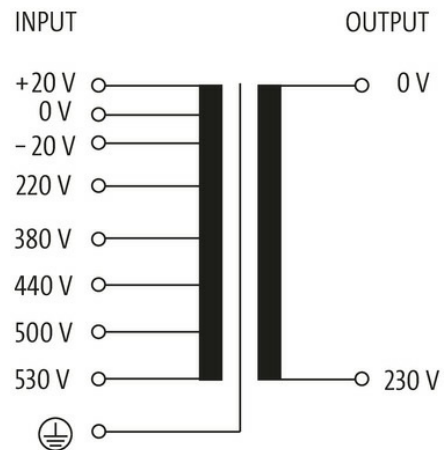

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Test isolation voltage	6.3 kV (prim./sec.)
Drill hole Ø	7×15 mm
Fixing centers a×b×c	91×122×7 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 112×150×148 mm

Output

Output voltage 230 V AC

Output rating 500 VA

Input

Input voltage 220, 380, 440, 500, 530 V AC

Inrush current 40 A (220 V AC)

Short-circuit current 52 A (220 V AC)

Input current 2.51 A (220 V AC); 1.05 A (530 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879073936

eClass 27031202

Packaging unit 1.000