

**EXACT8, 4XM8, 4 POLE BASIC HOUSING**



Without homerun-cable

4-way, 4-pole



Inline face or side mounting

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

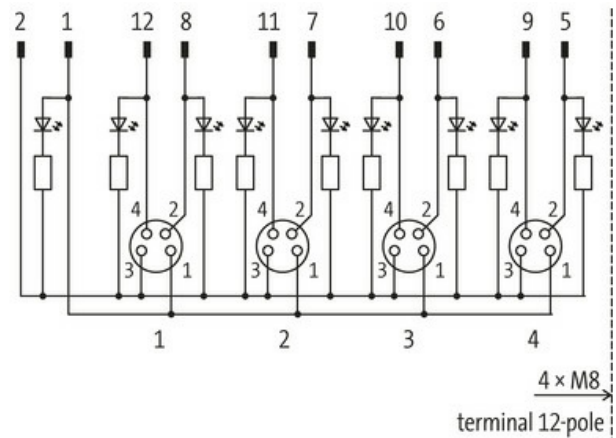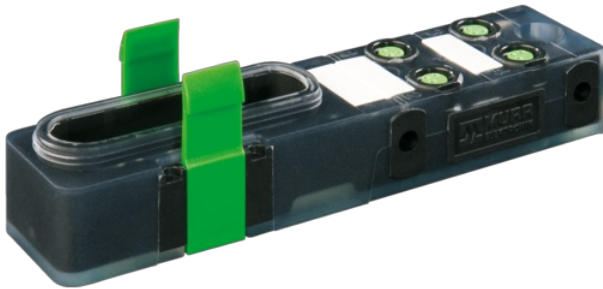**[Link to Product](#)****Illustration**

M8 Females 4-pole

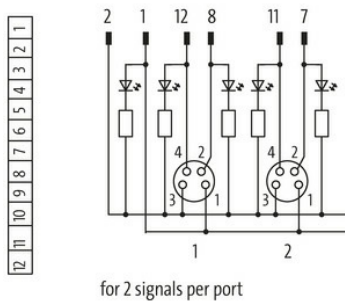

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Protection	IP65/IP67
Total current	max. 8 A

**General data**

Temperature range -20...+70 °C, depending on cable quality

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

**Commercial data**

country of origin	DE
customs tariff number	85444290
EAN	4048879056298
eClass	27279219
Packaging unit	1.000