

TELEMECANIQUE CONTACTOR SUPPRESSOR

Varistor, 48VAC/DC

24 V AC/DC



48 V AC/DC

VDR


For other configurations and voltages, please inquire.

[Link to Product](#)

Illustration

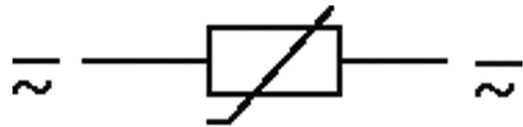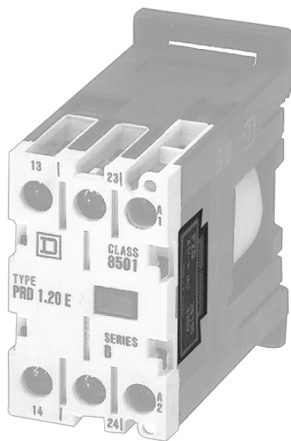

VDR

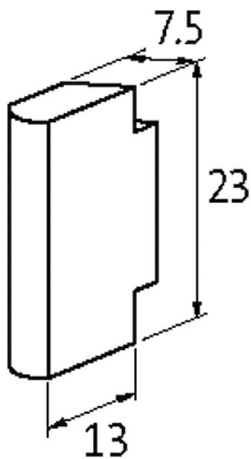

Product may differ from Image



Technical Data

Input voltage	24...53 V AC/DC
Material	Flame retardant plastic acc. to (UL 94)
Damping factor	approx. 1.5x UN
Connection wires	Plug contact

General data

Temperature range	-20...+70 °C
-------------------	--------------

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 13×23×7.5 mm

Appropriate contactors

M

SC-M

CAWM

Commercial data

country of origin CZ

customs tariff number 85363010

EAN 4048879018111

eClass 27371013

Packaging unit 1.000