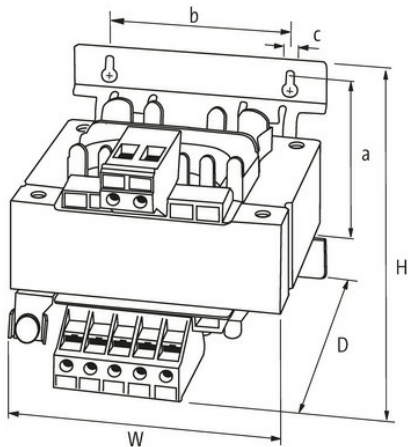
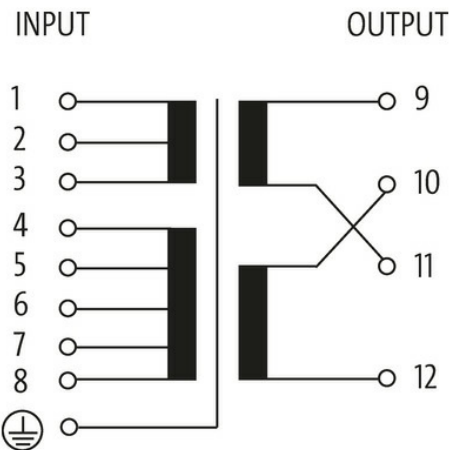


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 1600VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
 1600 VA
 Isolation class T 40/B
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

| | |
|------------------------|---|
| Standards | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
| Mounting method | Key-hole mounting |
| Temperature range | -20...+40 °C (storage temperature -20...+80 °C) |
| Test isolation voltage | 4 kV (prim./sec.) |
| Drill hole Ø | 7×11 mm |
| Fixing centers a×b×c | 141×135×7 mm |

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 168×174×163 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 1600 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 182 A (208 V AC); 70 A (550 V AC)

Short-circuit current 460 A (208 V AC); 175 A (550 V AC)

Input current 8.8 A (208 V AC); 3.3 A (550 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043200

EAN 4048879078719

eClass 27031302

Packaging unit 1.000