

**M12 male 0° A-cod. / MSUD valve plug A-18mm**

PVC 3x0.75 bk 0.6m

Form A (18 mm) – M12, male straight

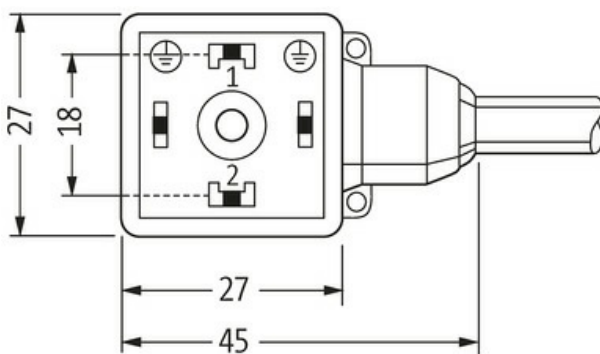
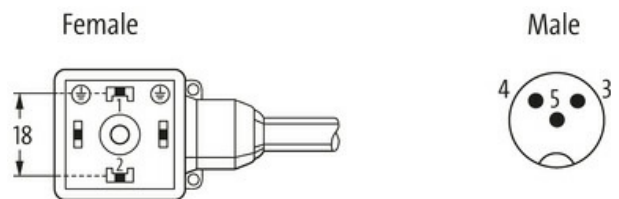
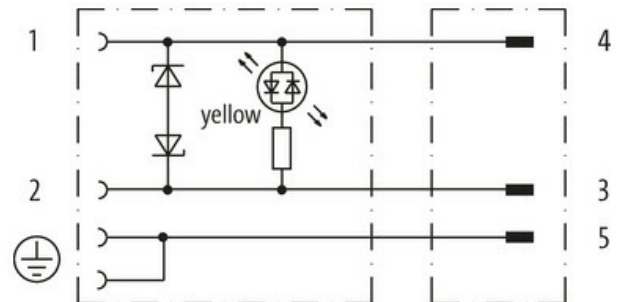
110 V AC/DC  $\pm 10\%$ 

LED and suppression

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product****Illustration**

Height: 30 mm

Product may differ from Image

**Form**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Form 40891

| Technical Data                     |                                                  |
|------------------------------------|--------------------------------------------------|
| Operating voltage                  | 110 V AC/DC ±10%                                 |
| Rated surge voltage                | 2.5 kV                                           |
| Operating current per contact      | max. 4 A                                         |
| Material group                     | IEC 60664-1, category I                          |
| Switch off peak                    | max. 250 V                                       |
| LED display                        | yellow                                           |
| Locking of ports                   | M3/M12×1 mm (recommended torque 0.4/0.6 Nm)      |
| Compression gland                  | M12 (SW13)                                       |
| Protection                         | IP67 inserted and tightened (EN 60529)           |
| Material                           | MSUD (PBT); M12 (PUR)                            |
| Locking material                   | Zinc die casting, matte nickel plated            |
| Housing                            | Black plastic (gray on request)                  |
| Switch off delay time              | max. 20 ms                                       |
| General data                       |                                                  |
| Pollution Degree                   | 3                                                |
| Temperature range                  | -25...+85 °C, depending on cable quality         |
| Cables                             |                                                  |
| No./diameter of wires              | 3× 0.75 mm <sup>2</sup>                          |
| Wire isolation                     | PVC (bk num, gnye)                               |
| Outer Ø                            | 5.9 mm ±5%                                       |
| Cable identification               | 616                                              |
| Cable Type                         | 1 (PVC)                                          |
| Approval (cable)                   | CE conform                                       |
| Cable weight [g/m]                 | 61,6 g                                           |
| Material (wire)                    | Cu wire, bare                                    |
| Resistor (core)                    | max. 26 Ω/km (20 °C)                             |
| Single wire Ø (core)               | 0.2 mm                                           |
| Construction (core)                | 24× 0.2 mm (multi-strand wire class 5)           |
| Diameter (core)                    | 3× 0.75 mm <sup>2</sup>                          |
| AWG                                | similar to AWG 18                                |
| Material (wire isolation)          | PVC                                              |
| Material property (wire isolation) | CFC-, cadmium-, silicone- and lead-free          |
| Shore hardness (wire isolation)    | 43 ±5 D                                          |
| Wire-Ø incl. isolation             | 1.8 mm ±5%                                       |
| Color/numbering of wires           | bk numbered, gnye longitudinally striped         |
| Stranding combination              | 3 wires twisted                                  |
| Shield                             | no                                               |
| Material (jacket)                  | PVC                                              |
| Material property (jacket)         | CFC-, cadmium-, silicone- and lead-free          |
| Shore hardness (jacket)            | 80 ±5 A                                          |
| Outer-Ø (jacket)                   | 5.9 mm ±5%                                       |
| Color (jacket)                     | black                                            |
| Cable labeling                     | see frame delivery specifications 7000-00000-001 |
| Jacket Color                       | black                                            |
| chemical resistance                | good resistance to oil, gasoline and chemicals   |
| Nominal voltage                    | 300/500 V AC                                     |
| Test voltage                       | 3000 V AC                                        |
| Current load capacity              | to DIN VDE 0298-4                                |
| Temperature range (fixed)          | -30...+70 °C                                     |
| Temperature range (fixed)          | -30...+70 °C                                     |
| Temperature range (mobile)         | -5...+70 °C                                      |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

|                            |             |
|----------------------------|-------------|
| Temperature range (mobile) | -5...+70 °C |
| Bend radius (fixed)        | 5× outer Ø  |
| Bend radius (moving)       | 10× outer Ø |
| Bend radius (moving)       | 10× outer Ø |
| Material (jacket)          | PVC         |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85444290      |
| EAN                   | 4048879294539 |
| eClass                | 27279218      |
| Packaging unit        | 1.000         |