

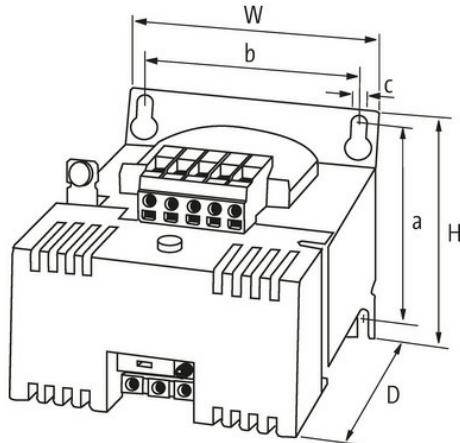
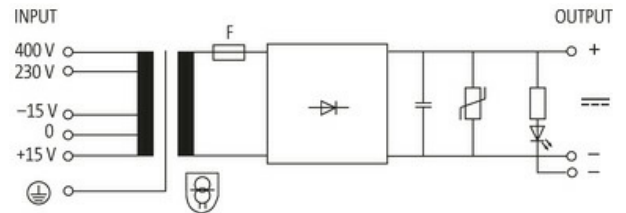
MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/7,5ADC

Current: 7.5 A

Output rating: 180 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	86.5×80.5×5.8 mm
Dimensions H×W×D	103×105×150.5 mm

Output

Output voltage	24 V DC (SELV)
----------------	----------------

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output current (Ta 60/40 °C)	max. 7.5 A (230 V AC); 9 A (400 V AC)
------------------------------	---------------------------------------

Output suppression	LED, VDR and smoothing capacitor
--------------------	----------------------------------

Output fuse	15 A (automotive fuse FKS)
-------------	----------------------------

Ripple	max. 5% eff/rms
--------	-----------------

Input

Input voltage	230/400 ±15 V AC
---------------	------------------

Input fuse (external)	2 A (230 V AC); 1.25 A (400 V AC)
-----------------------	-----------------------------------

Input current	1.44 A (230 V AC); 0.84 A (400 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85044090
-----------------------	----------

EAN	4048879080002
-----	---------------

eClass	27049002
--------	----------

Packaging unit	1.000
----------------	-------