


MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 500VA IN: 240-415VAC OUT: 110-110-20VAC

Single-phase - Control and Isolation Transformers
500 VA
Spring clamp terminals
Isolation class T 60/B

[Link to Product](#)

Illustration

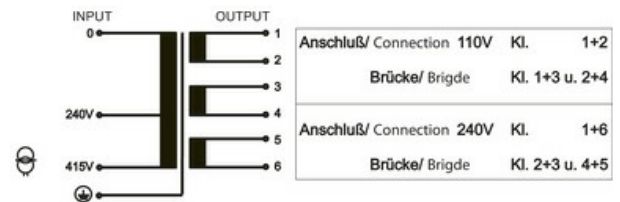

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	90×122×7 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 112.6×150×170 mm

Output

Output voltage 110/240 V AC

Output rating 500 VA

Input

Input voltage 240/415 V AC

Inrush current 58.3 A (240 V AC); 33.6 A (415 V AC)

Short-circuit current 51.33 A (240 V AC); 29.7 A (415 V AC)

Input current 2.3 A (240 V AC); 1.36 A (415 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879066501

eClass 27031302

Packaging unit 1.000