

RJ45 male 0°/RJ45 male 0° Gigabit

PUR 4x2xAWG26 shielded gn UL/CSA 10m

Ethernet

CAT6A

Male straight – male straight

RJ45 – RJ45, 8-pole


shielded

without cable sleeves

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

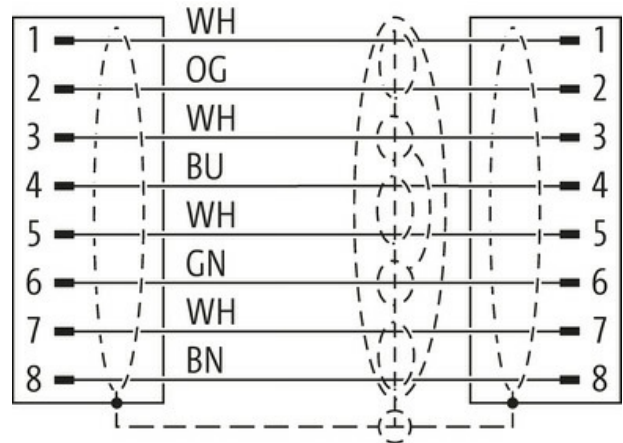[Link to Product](#)**Illustration**

Male



Male

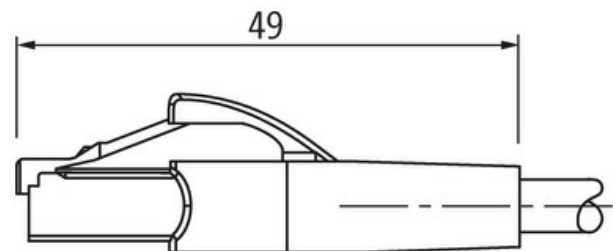

Product may differ from Image

Form

Form 74311

Technical Data

| | |
|-------------------------------|---|
| Operating voltage | max. 60 V DC |
| Rated surge voltage | 1.0 kV |
| Operating current per contact | max. 1.76 A |
| Transfer parameters | CAT6, Class EA (ISO/IEC 11801:2002), (EN 50173-1) |
| Transfer rate | 10 Gbit/s |
| Material group | IEC 60664-1, category I |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

| | |
|---|-------------------|
| LED display | no |
| Locking of ports | Snap-in connector |
| Protection | IP20 |
| Material | PUR |
| Locking material | PA |
| suitable for corrugated tube (internal Ø) | without |

General data

| | |
|-------------------|--|
| Mounting method | inserted |
| Pollution Degree | 3 |
| Temperature range | -25...+85 °C, depending on cable quality |

Cables

| | |
|----------------------------|---|
| Cable identification | 790 |
| Approval (cable) | cURus (AWM-Style 20549/11635); CE conform |
| Cable weight [g/m] | 52,8 g |
| Material (wire) | Cu wire, bare |
| Resistor (core) | max. 143 Ω/km (20 °C) |
| Single wire Ø (core) | 0.16 mm |
| Diameter (core) | 4 × 2 × AWG26/7 |
| Material (wire isolation) | PE |
| Wire-Ø incl. isolation | 1.05 mm ±5% |
| Color/numbering of wires | (WH, OR), (WH, BU), (WH, BN), (WH, GN) |
| Shield | yes |
| optical shield cover | approx. 65% |
| Material (jacket) | PUR |
| Outer-Ø (jacket) | 6.4 mm ±5% |
| Color (jacket) | green |
| chemical resistance | Oil resistance according to IEC 60811-2-1, ASTM IRM 901, ICEA S-82-552 Std. |
| Nominal voltage | 125 V AC |
| Test voltage | 1500 V (wire/wire); 1000 V (wire/shield) |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -30...+70 °C |
| Bend radius (fixed) | 8 × outer Ø |
| Bend radius (moving) | 10 × outer Ø |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | HU |
| customs tariff number | 85444210 |
| EAN | 4048879746311 |
| eClass | 27061801 |
| Packaging unit | 1.000 |