
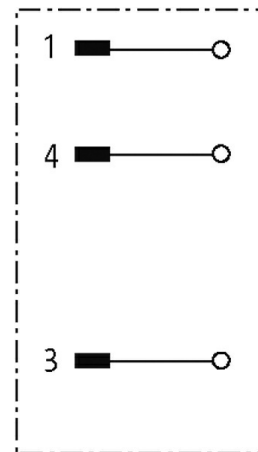


MOSA MQ12 MALE 0° FIELD-WIREABLE (IDC)3-pol. 0.5...1.0mm²

Male straight
MQ12, 3-pole
IDC terminals
Connection cross section: 0.5...1.0 mm²

[Link to Product](#)**Illustration**

Male

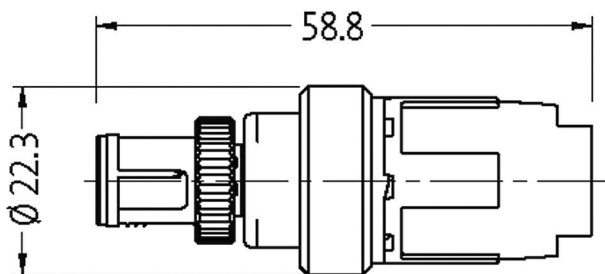

Product may differ from Image

Form

Form 12501

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.5...1.0 mm ² (conductor diameter min. 0.1 mm)
Outer wire Ø	1.6...2.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Sealing range (cable Ø)	5.5...8 mm
Wire isolation	PVC, PP, TPE

Commercial data

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

country of origin	DE
customs tariff number	85366990
EAN	4048879106658
eClass	27279218
Packaging unit	1