

T-coupler M12 male / M12 male - female PROFIBUS

T-coupler

Male straight – female/male straight

M12 – M12, 5-pole

B-coded




shielded

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

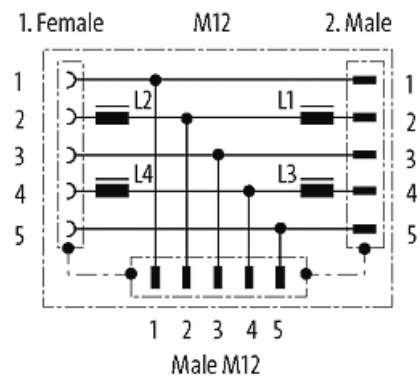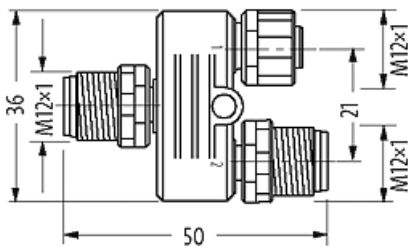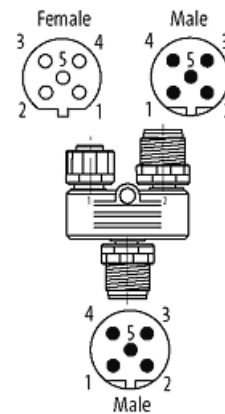

Product may differ from Image



Form

Form 44151

Technical Data

Operating voltage	5 V DC (via the fieldbus device)
Operating current per contact	max. 12.5 mA
No. of poles	5
Material group	IEC 60664-1, category I
Transfer rate	12 Mbps
Coding	B-coded

Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

General data

Mounting method	inserted, tightened
Pollution Degree	3
Temperature range	-25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879141413
eClass	27143423
Packaging unit	1