


Cube67 I/O Cable-Module, I/O Extension Module

DI16/DO16, Open-End, 2m

Expansion module
With open ended wires
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

Link to Product

Illustration

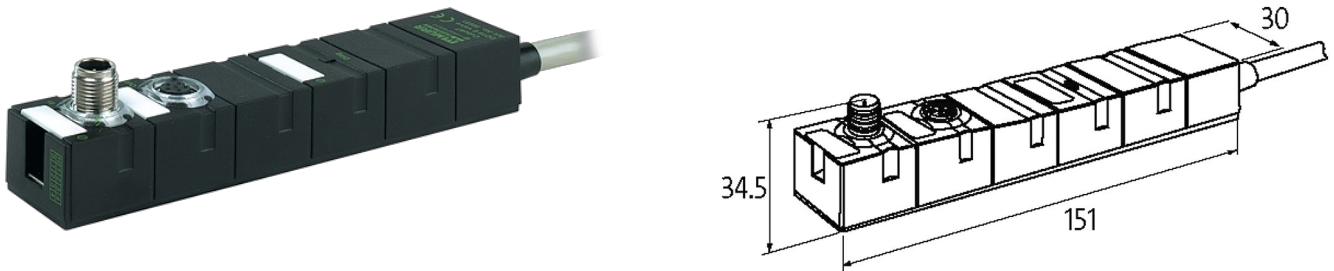

Product may differ from Image

General data

Protection	IP67
Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Dimensions H×W×D	150×30×34.5 mm

Output

Actuator supply UA	24 V DC (EN 61131-2), via system connection (max. 4 A)
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Input

Sensor supply US	24 V DC (EN 61131-2), max. 0.2 A
Type	for 3-wire sensors or mechanical switches, PNP
Input filter	1 ms

Cables

No./diameter of wires	36× 0.14 mm ²
Material (jacket)	PVC
Cable Length	2.0 m

Internal communication

Current consumption	max. 50 mA
LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2× 4 A)
I/O ports	Open cable

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Actuator warning per channel via BUS

Commercial data	
country of origin	DE
customs tariff number	85444290
EAN	4048879413145
eClass	27242604
Packaging unit	1