

Emparro ACCUcontrol UPS-Module


IN: 24VDC OUT: 24VDC/40A

INPUT: 24 V DC (SELV/PELV)

OUTPUT: max. 40 A

[Link to Product](#)

Illustration

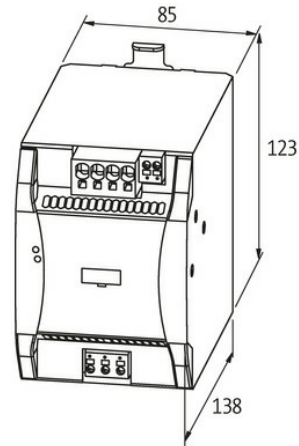

Product may differ from Image



Technical Data

| | |
|--------------|-----------------------------------|
| Sensor type | KTY 81-210 (Art.No. 89600) |
| Battery type | Lead battery (max. 40 Ah, sealed) |

General data

| | |
|-------------------|--|
| Mounting method | DIN-rail mountable TH35-7.5/TH35-15 (EN 60715) |
| Temperature range | -25...+45 °C |
| Connection | Push-In spring clamp terminals, Mini-USB |
| Dimensions H×W×D | 123×85×143 mm |

Output

| | |
|----------------|------------------|
| Output voltage | 27.7...19.2 V DC |
| Output current | max. 40 A |

Input

| | |
|-----------------|-----------------------------------|
| Input voltage | 21.6...30 V DC (buffer operation) |
| Loading current | 2 A |
| Input current | max. 43 A |

Control inputs

| | |
|-----------------------------|---------------------------------------|
| Input voltage shutdown (SH) | 24 V DC (6...45 V DC), potential free |
|-----------------------------|---------------------------------------|

Control outputs

| | |
|------------------------|---|
| Input voltage (Uin OK) | min. 5 V DC, 1 mA; max. 30 V DC, 100 mA |
| Battery (BAT OK) | min. 5 V DC, 1 mA; max. 30 V DC, 100 mA |

Commercial data

| | |
|-------------------|----|
| country of origin | DE |
|-------------------|----|

| | |
|-----------------------|---------------|
| customs tariff number | 85044055 |
| EAN | 4048879694346 |
| eClass | 27049002 |
| Packaging unit | 1.000 |