



FREQUENCY/VOLTAGE-CURRENT-CONVERTER

IN: 0..100 kHz - OUT: 0..10 V / (0)4..20 mA

INPUT: 0...1, 0...10, 0...100 kHz
 OUTPUT: 0...10 V DC, 0...20 mA, 4...20 mA
 Screw terminals
 Input and output galvanically separated

[Link to Product](#)

Illustration

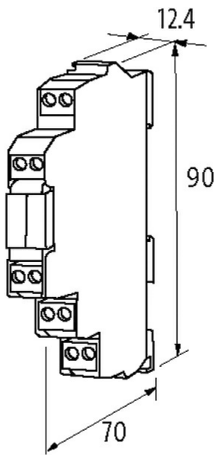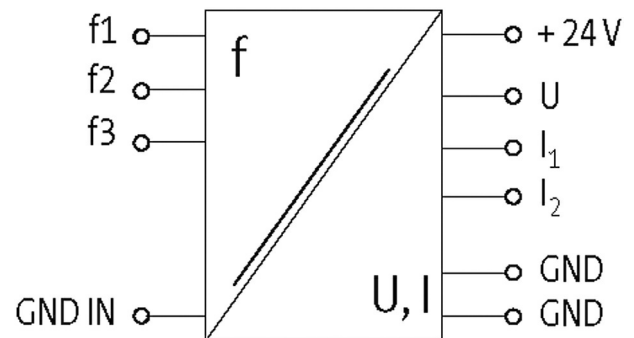

Product may differ from Image

Technical Data

Operating voltage	24 V DC $\pm 20\%$
Operating current	max. 80 mA
Response time	max. 350 ms
Tolerance	0.5% from end value

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C
Test isolation voltage	2.5 kV
Dimensions HxWxD	90x12.4x70 mm

Description

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

