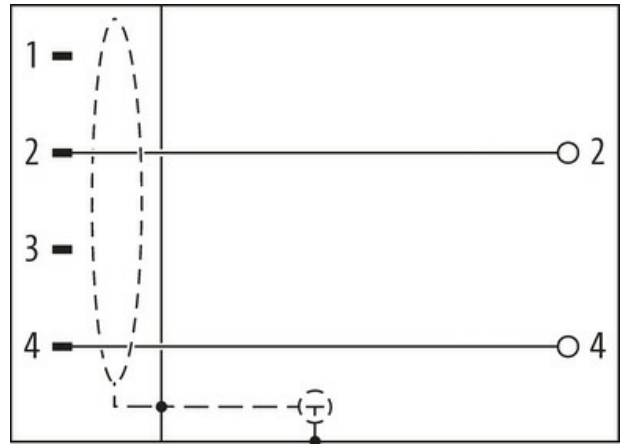



MOSA M12 MALE 0° FIELD-WIREABLE (IDC)B-cod., 2-pol., 0,25-0,34mm², shielded

PROFIBUS
Male straight
M12, 2-pole
B-coded
shielded
IDC terminals

[Link to Product](#)**Illustration****Male**

Product may differ from Image

**Form**

Form 14205

Technical Data

Operating voltage max. 32 V AC/DC

Operating current per contact max. 4 A

Connection cross section	0.25...0.34 mm ² (AWG 22...24)
Sealing range (cable Ø)	4.5...8.8 mm
Protection	IP67 inserted and tightened (EN 60529)
Outer wire Ø	2.0...2.6 mm

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879331739
eClass	27279221
Packaging unit	1.000