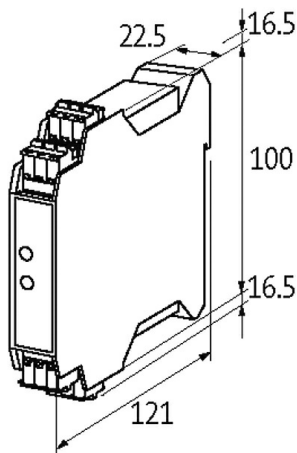
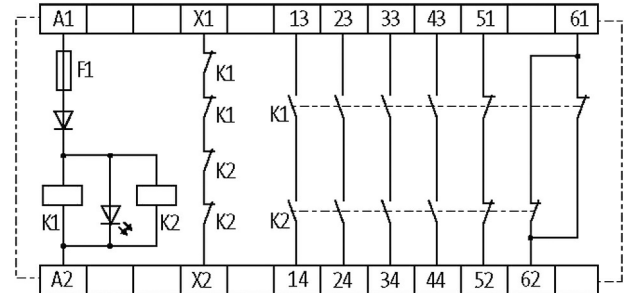


**MIRO SAFE+ E 24**

24 VAC/DC - 4 N/O contact / 2 N/C contact

6 A  
Expansion modules[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+45 °C (storage temperature -40...+85 °C)
Mech./ elect. life	10 000 000 switching cycles/load dependent
Connection	Spring clamp plug-in terminals
Dimensions HxWxD	100x22.5x121 mm

**Output**

No. of alarm outputs	0
----------------------	---

Contact material	Ag Sn O, self cleaning, positively driven
Switching voltage	max. 250 V AC/DC
No. of contacts	4 - (13-14); (23-24); (33-34); (43-44)
No. of auxiliary contacts	2 - (51-52); (61-62)
Switching current per output	max. 6 A

**Input**

Input voltage	24 V DC (-15 +20%), 24 V AC (-15 +10%)
Input current	max. 1.0 VA

**Utilization category**

AC-15	6 A (230 V AC)
Safety contacts (STOP 0)	max. 250 V AC/6 A; min. 10 V AC/10 mA (resist./ind.), at suitable suppression
DC-13	6 A (24 V DC)

**Commercial data**

country of origin	DE
customs tariff number	85364900
EAN	4048879367622
eClass	27371819
Packaging unit	1.000