

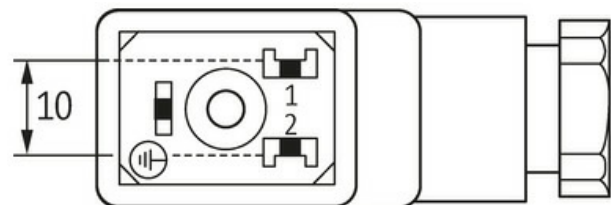
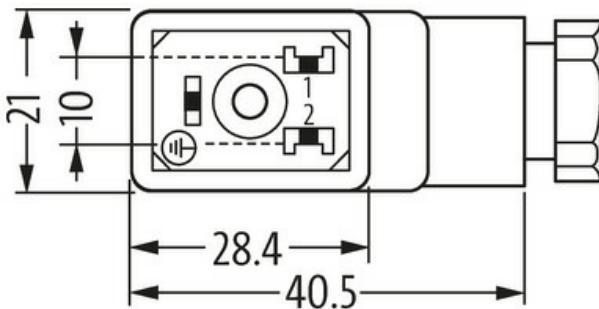
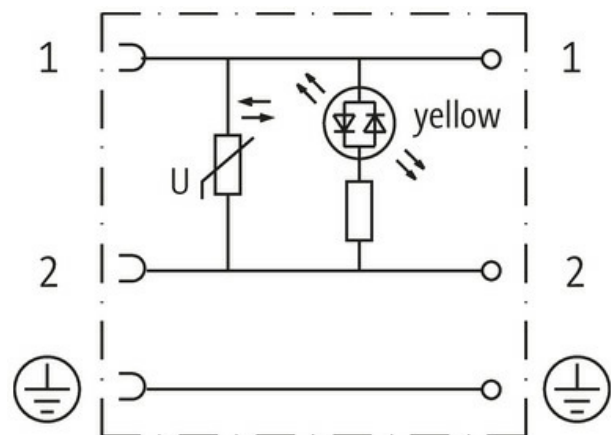
SVS ECO LED VALVE PLUG FORM B 10 MM LED VDR 24V

2+PE field-wireable M16x1.5

Form B (10 mm)
 24 V AC/DC $\pm 15\%$
 LED and VDR
 metric
 field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Height: 31.7 mm

Product may differ from Image

**Form**

Form 29565

Technical Data

Operating voltage	24 V AC/DC $\pm 15\%$
Operating current per contact	max. 1.5 A

LED display	yellow
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16×1.5 mm
Connection cross section	0.5...1.5 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP65 inserted and tightened (EN 60529)
Additional suppressor	VDR
Tightening torque (clamp screw)	0.2 ±0.1 Nm
Configuration	2 contacts + PE

General data

Mounting method	inserted, tightened
Material (gasket)	NBR
Temperature range	-40...+90 °C
Housing	PA6 GF20: opaque (milky)

Commercial data

country of origin	HU
customs tariff number	85366990
EAN	4048879187343
eClass	27279221
Packaging unit	1.000