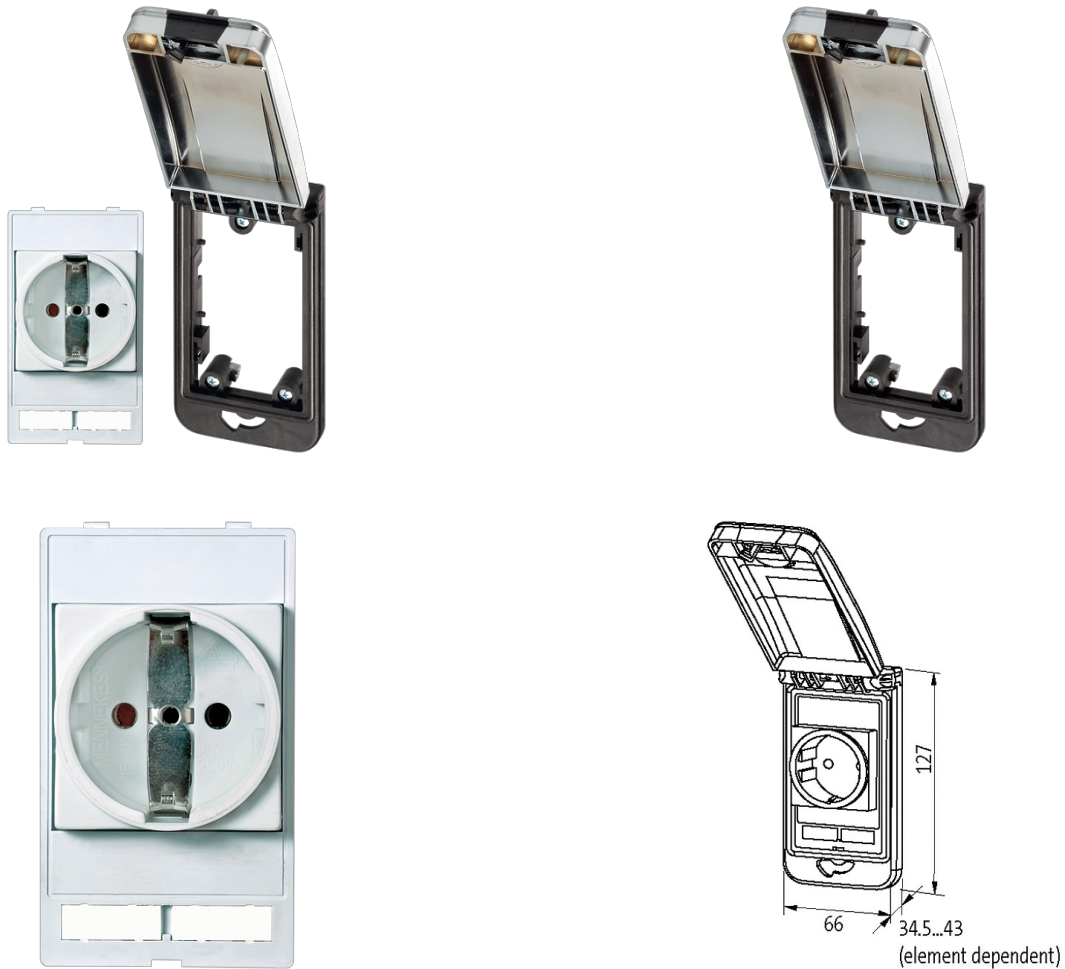


**Modlink MSDD-set: Frame 4000-68513-0000001,**

insert 4000-68000-0160000

[Link to Product](#)**Illustration**

Product may differ from Image

**Frame**

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Housing	Frame: plastic PA black, cap: plastic ABS metallic
Temperature range	-30...+70 °C (storage temperature -30...+80 °C)

**Germany (VDE)**

Operating voltage	230 V AC
Operating current	16 A
No. of poles	2 + PE
Connection	Spring clamp terminals: max. 2× 2.5 mm <sup>2</sup> (AWG 14)

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879572125
eClass	27189217

Packaging unit

1