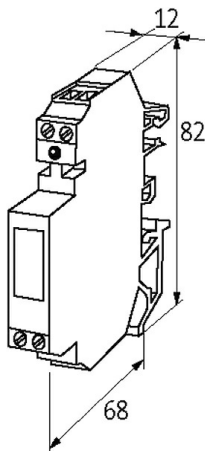
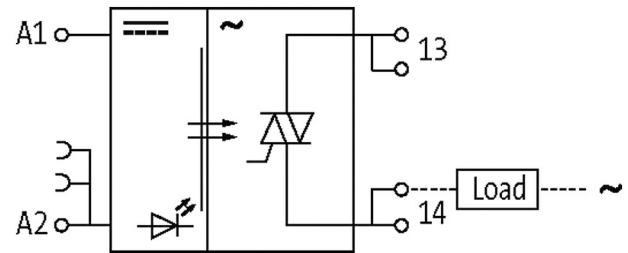


AMMDS 20-47/2 OPTO-COUPLER MODULE

IN: 35 VDC - OUT: 280 VAC / 2A

Triac 2 A
24 V DC
with minus plug link

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	68x12x82 mm

Output

Leakage current (output is open)	max. 2 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1 V AC
Switching voltage	24...280 V AC
Switching frequency	max. 20/5 Hz (resist./ind.)

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Switching current per output 50 mA...2 A

Input

Plug link (supplied)	Art-No. 90960
Voltage range OFF	0...3 V DC
Voltage range ON	10...35 V DC
LED display	LED (red)
Input current	6 mA

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879027953
eClass	27371604
Packaging unit	1.000