

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

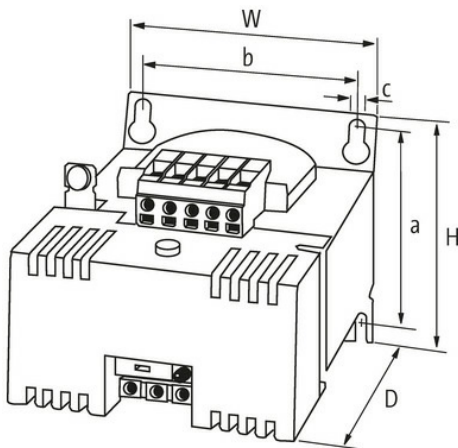
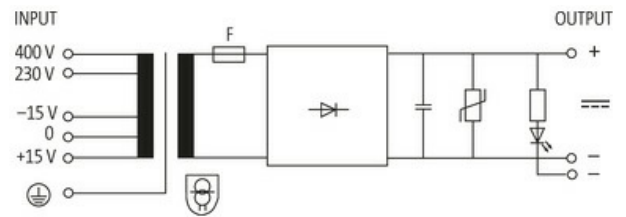
IN: 230/400+/-15VAC OUT: :24V/5ADC

Current: 5 A


Output rating: 120 W

with MES DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	75×84×5.8 mm
Dimensions H×W×D	95×96×136 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 5 A (230 V AC); 6 A (400 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	10 A (automotive fuse FKS)
Ripple	max. 5% eff/rms

Input

Input voltage	230/400 ±15 V AC
Input fuse (external)	1.6 AT (230 V AC); 1.0 AT (400 V AC)
Input current	0.97 A (230 V AC); 0.56 A (400 V AC)
Frequency	50..60 Hz

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879065733
eClass	27049002
Packaging unit	1.000