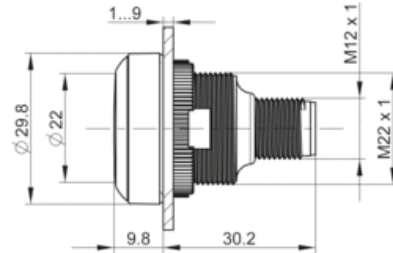


R-Button 22 1NO L M12(4)

Illuminated reset button

[Link to Product](#)**Illustration**

Product may differ from Image

Mechanical protection

	type 4X
Mechanical endurance	500000 Cycles
Mechanical endurance B10	650000 Cycles

Electrical data

Short-circuit current	1000 A
	Sicherung 250 V / 0,1 A / 1,5 kA gG flink
Switching current	0,01...100 mA
	≤ 30 V DC (42,4 V peak)
Switching voltage	0,02...35 V
Rated operating current I _e	0,1 A
Rated operating voltage (DC-13)	35 V
Rated operating voltage (AC-15)	35 V
Operating voltage	28 V
Power rating (voltage dependent)	1 W
Rated surge voltage	800 V
Rated insulation voltage	250 V

Ambient characteristics

	IEC 60068-2-11
Installation height	≤ 2000 m
Relative humidity	≤ 93% @ 40 °C
storage temperature	-40...85 °C
operating temperature	-25...70 °C

Mechanical data

	30 mm
	22,3 mm
	30,2 mm
Installation height	9,8 mm

Dimensions H×W×D	29,8 x 40 mm
Collar shape	rund
	M12, 4-polig A-kodiert
	Gewinding
Color of front ring	black
Collar color	black
	black
Color of illuminant	weiß
Type of the lamps	LED
Can be illuminated	yes
Contact material	Gold
	1 S
	≤ 1 mm
Actuating force	5 ... 12 N
Actuating function	tastend
Housing	Plastic
Commercial data	
country of origin	DE
customs tariff number	85365080
EAN	4048879594837
Packaging unit	1.000