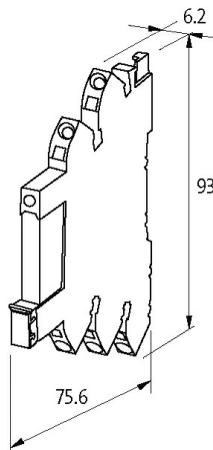
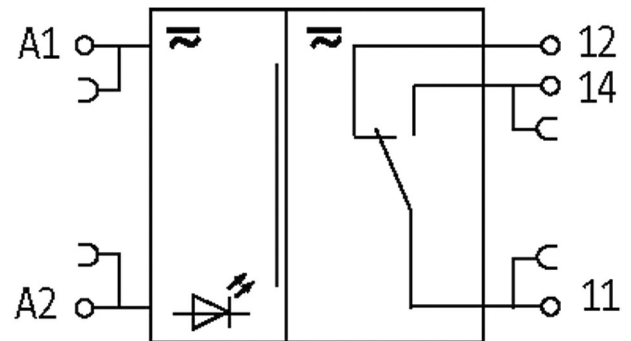


MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY

IN: 125 VAC/DC - OUT: 250 VAC/30VDC / 6 A

1 NO/NC contact
6 A
115 V AC/DC
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	250 V
Mech./ elect. life	10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent
Protection	IP20
Dimensions HxWxD	93x6.2x75.6 mm

Output

Min. load current	100 mA
Contact material	Ag Sn O2
Energize/release/contact bounce time	8/4/- ms

Switching voltage	max. 250 V AC/30 V DC
-------------------	-----------------------

Switching frequency	max. 10 Hz
---------------------	------------

Power rating (voltage dependent)	max. 1500 VA/180 W
----------------------------------	--------------------

Switching current per output	max. 6 A
------------------------------	----------

Input

Connection voltage - current	115...125 V AC/DC (88...138 V AC/DC) - 8 mA
------------------------------	---

LED display	LED (green)
-------------	-------------

Utilization category

AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
-------	-------------------------------------

AC-12	6 A (24/110/230 V AC)
-------	-----------------------

DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
-------	---

Commercial data

country of origin	CN
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879021425
-----	---------------

eClass	27371601
--------	----------

Packaging unit	1.000
----------------	-------