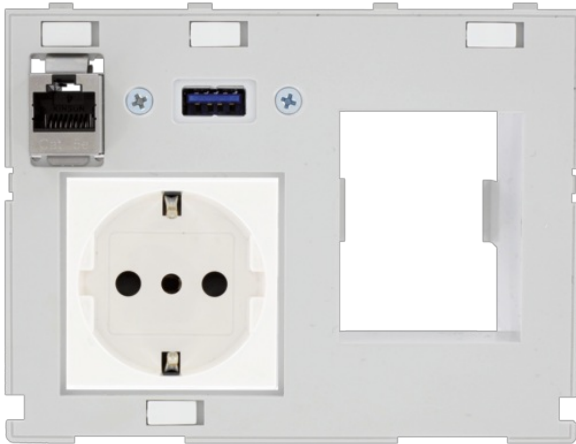


MODLINK MSDD DBL COMBI INSERT ITALY

1xRJ45+USB-A + RCD opening

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions H×W×D	88×116×70 mm
------------------	--------------

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

USB

Operating current	1.5 A
Specification	USB: 3.0 (max. 5 Gbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC

Italy (CEI 23-16)

No. of poles	2 + PE
Connection	Screw terminals: max. 2× 4 mm ² (AWG 12)
Operating voltage	250 V AC
Operating current	16 A

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879483582
eClass	27189217
Packaging unit	1.000