


REPLACED BY 7000-08581-9690020



Flange female
M8, 4-pole
Front mounting
with multi-strand wire

[Link to Product](#)

Illustration

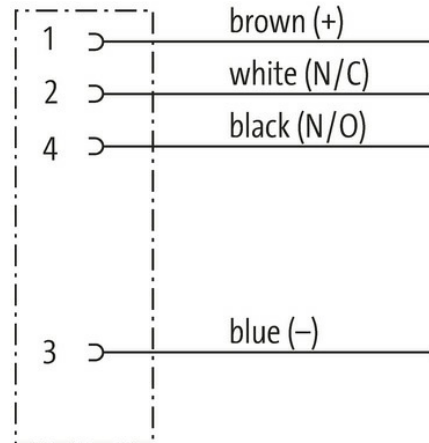

Female

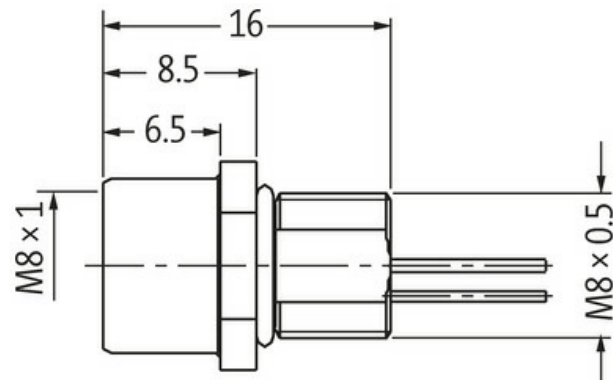

Product may differ from Image



Form

Form 08581

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8x1 mm) recommended torque 0.4 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

Protection NEMA 3, 4, 6P (UL 50E)

General data

Temperature range -25...+85 °C

Cables

No./diameter of wires 4× 0.34 mm²

Wire isolation PUR

Outer Ø 1.3 mm ±5%

Cable number 971

Temperature range (fixed) -40...+90 °C

Temperature range (mobile) -25...+90 °C

Bend radius (fixed) 5× outer Ø

Commercial data

country of origin DE

customs tariff number 85444290

EAN 4048879224550

eClass 27061801

Packaging unit 1.000