

MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 250VA IN: 208...550VAC OUT: 2x115VAC special dimensions

Single-phase - Control and Isolation Transformers


250 VA

Isolation class T 40/B

Other voltages on request.

Link to Product

Illustration

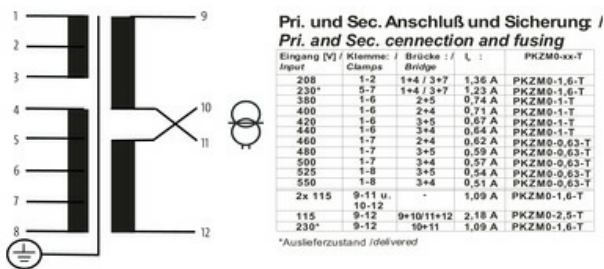

Product may differ from Image



General data

Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	6.3 kV (prim./sec.)
Fixing centers a×b×c	70×90 mm
Dimensions H×W×D	102×120×122 mm

Output

Output voltage	1 × 230, 1 × 115, 2 × 115 V AC
Output rating	250 VA

Input

Input voltage	208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC
Inrush current	26 A (208 V AC); 9.6 A (550 V AC)
Short-circuit current	25 A (208 V AC); 9.2 A (550 V AC)
Input current	1.36 A (208 V AC); 0.51 A (550 V AC)
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879588164
eClass	27031302
Packaging unit	20.000