

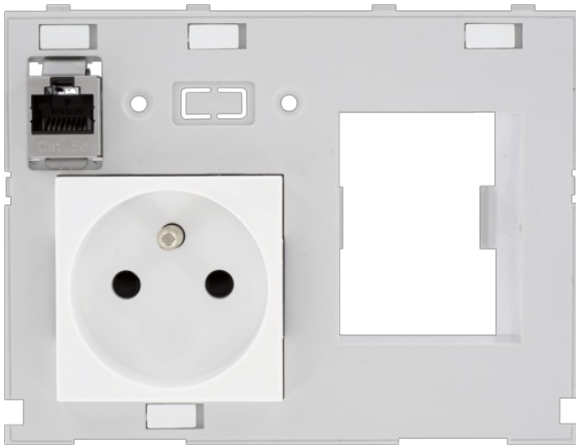
MODLINK MSDD DBL COMBI INSERT FRANCE SC

1xRJ45 fem./fem. + RCD opening

1× France (UTE-NF) white

1× RJ45, 8-pole metal, CAT5e (female/female)

1× FI cut-out

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions H×W×D 88×116×70 mm

RJ45

Operating current (UL Rating) max. 175 mA

Locking of ports Snap In

Connection front side RJ45

Connection rear side RJ45

Operating voltage (UL Rating) max. 30 V AC/42.4 V DC

Specification CAT5e, Class D, 100 MHz, (EN 50173-1)

France (UTE-NF)Connection Spring clamp terminals: max. 2× 2.5 mm² (AWG 14)

Operating current 10...16 A

No. of poles 2 + PE

Operating voltage 250 V AC

Shielding plate

Tightening torque 0.9 Nm ±0.1

Connection Threaded hole M4

Commercial data

country of origin FR

customs tariff number 85366990

EAN 4048879528948

eClass 27189217

Packaging unit 1.000