

## GSS DC/DC-CONVERTOR SWITCH MODE

IN: 15-40VDC OUT: 5V/4ADC

INPUT: 24 V DC



OUTPUT switched mode: 5 V DC

Output rating: 20 W

Current: 4 A

### [Link to Product](#)

#### Illustration

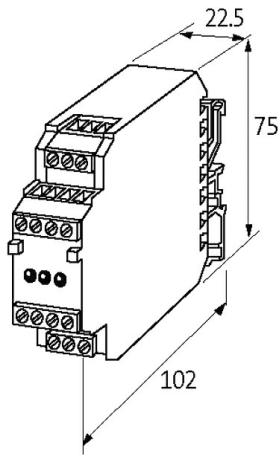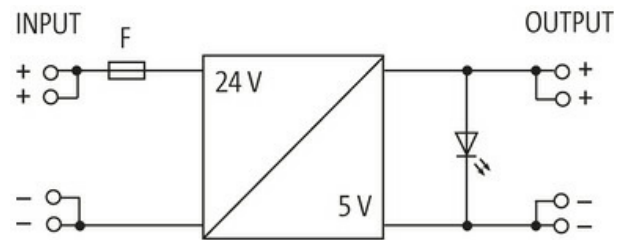

Product may differ from Image

#### General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C, no condensation

#### Output

Output voltage	5 V DC (SELV), ±5%
Output fuse	Short-circuit protected
Output current	max. 4 A
Ripple	max. 0.2% eff/rms

#### Input

Input voltage	15...40 V DC
Input current	1.04 A (24 V DC); max. 1.7 A

Input fuse (internal)	2 A (T)
-----------------------	---------

**Commercial data**

country of origin	CZ
customs tariff number	85044090
EAN	4048879079563
eClass	27210901
Packaging unit	1.000