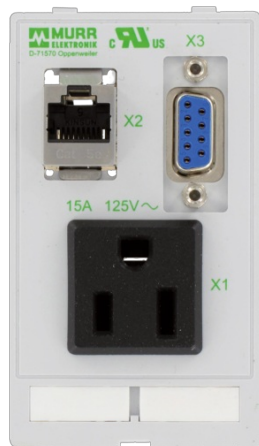


MODLINK MSDD SINGLE COMBI INSERT USA NEMA 5-15

1xSUD-D9 female/male + 1xRJ45 female/female

1 × NEMA 5-15 (plug-solder connection)
 1 × RJ45, 8-pole metal, CAT5e (female/female)
 1 × SUB-D9 (female/male)

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Dimensions H×W×D	88×51×30 mm
------------------	-------------

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

SUB-D9

Connection rear side	SUB-D (male)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

USA

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE

Connection Plug-solder connection: 4.8x0.5 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879037228
eClass	27189217
Packaging unit	1.000