

**IMPACT67 PN DO16 M12L 4P galvanic separation**

PROFINET, compact module

Digital outputs

DO16 (IRT)

Ethernet 10/100 Mbit/s; M12, D-coded

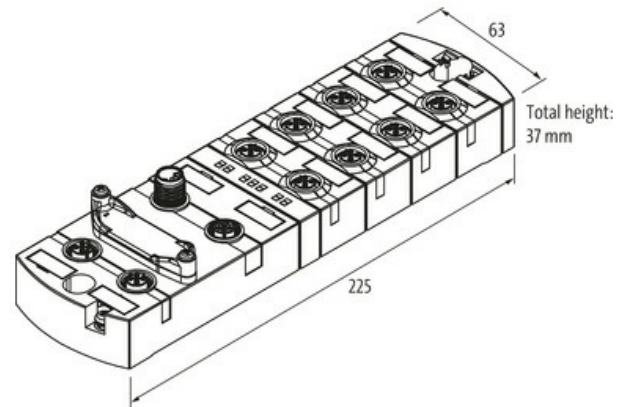
M12, 5-pole, A-coded

FSU (Fast-Start-Up)

Galvanic isolation

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

**Link to Product****Illustration**

Product may differ from Image

**General data**

Mounting method	2-hole screw mounting
Temperature range	-25...+55 °C (storage temperature -25...+70 °C)
Protection	IP67
Dimensions H×W×D	37×63×225 mm

**Output**

Actuator supply UA	24 V DC (EN 61131-2), max. 9 A
Switching current per output	max. 2 A (short-circuit and overload protected)

**Parameterization**

PIN 4	Output
PIN 2	Output

**Connections**

Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
I/O ports	M12, 5-pole, A-coded

**PROFINET**

Specification	V2.3, Conformance Class C (IRT)
Addressing	DCP

FSU (Fast-Start-Up)	max. 500 ms
PROFINET Netload Class	III
Shared Device	yes, for 2 controls

**Diagnostic**

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Actuator warning	per channel via LED and BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Cable break	per port

**Commercial data**

customs tariff number	85389099
EAN	4048879852258
Packaging unit	1.000