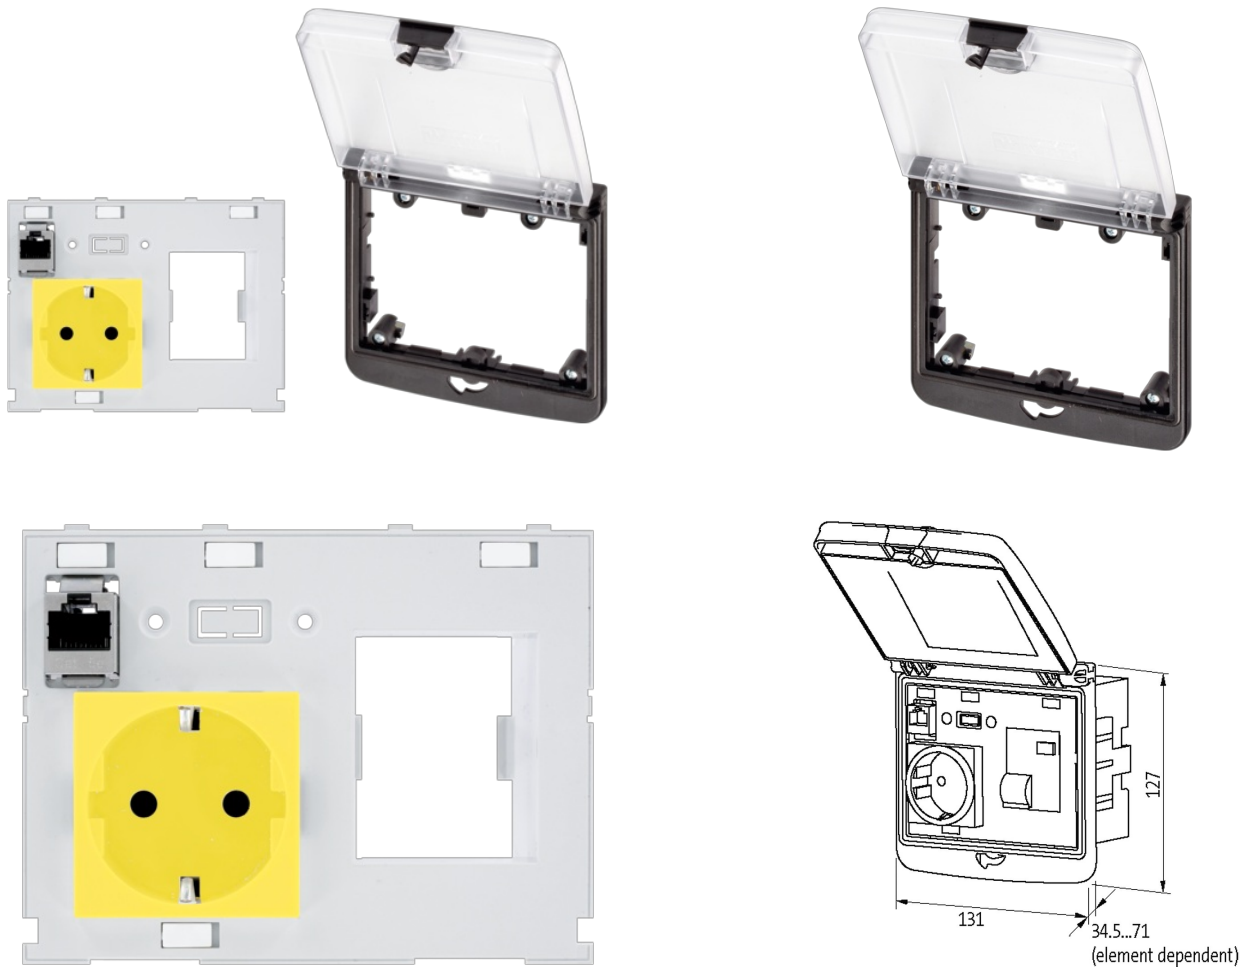


**Modlink MSDD-set: Frame 4000-68522-0000001,**

insert 4000-68000-4390001

[Link to Product](#)**Illustration**

Product may differ from Image

**Frame**

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-30...+70 °C (storage temperature -30...+80 °C)
Housing	Frame: plastic PA black, cap: plastic PC transparent

**RJ45**

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**Germany (VDE)**

Connection	Spring clamp terminals: max. 2x 2.5 mm <sup>2</sup> (AWG 14)
------------	--

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Operating voltage	250 V AC
No. of poles	2 + PE
Operating current	16 A
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85366990
EAN	4048879564373
eClass	27189217
Packaging unit	1.000