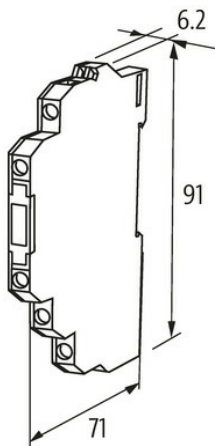
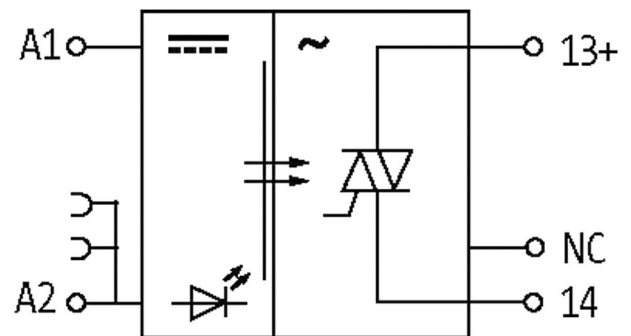


MIRO TH 24VDC SK 5P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
with auxiliary common contacts
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

| | |
|------------------------|--------------------------------|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+60 °C |
| Test isolation voltage | 2.5 kV |
| Housing | Black plastic, flame retardant |
| Dimensions H×W×D | 91×6.2×71 mm |

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|------------------------------------|--------------------------------------|
| Leakage current (output is open) | max. 0.3 mA |
| Switching time ON/OFF | 10/10 ms |
| Saturation voltage (across output) | max. 1.5 V AC |
| Switching voltage | 12...250 V AC |
| Switching frequency | max. 20 Hz, depending on suppression |
| Switching current per output | 1 mA...0.5 A |

Input

| | |
|-------------------|--------------|
| Control current | 6 mA |
| Voltage range OFF | 0...3 V DC |
| Voltage range ON | 10...44 V DC |
| LED display | LED (yellow) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85414900 |
| EAN | 4048879411325 |
| eClass | 27371604 |
| Packaging unit | 1.000 |