

M12 Power male recept. K-cod. front

PUR-wires 0.25 0.5m

Power

Flange male

M12, 5-pole

K-coded



Front mounting

with multi-strand wire

The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

[Link to Product](#)**Illustration**

1	BN
2	WH
3	BU
4	BK
PE	GN YE

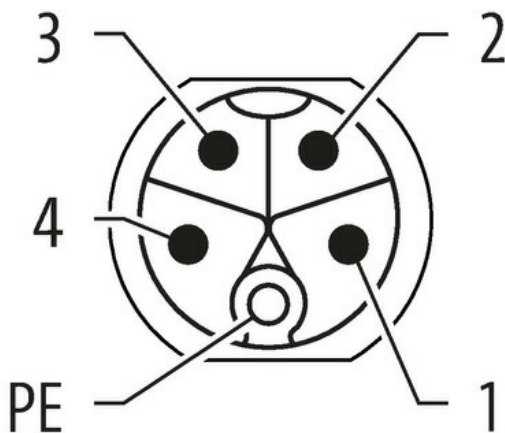

Product may differ from Image

Form

Form P3281

Technical Data

Operating voltage	max. 600 V AC
Rated surge voltage	6.0 kV
Operating current per contact	max. 12 A

No. of poles	5
Material group	IEC 60664-1, category I
Coding	K-coded
LED display	no
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm
Compression gland	Flange (SW17)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Brass, nickel plated
suitable for corrugated tube (internal Ø)	without
Housing	Brass, nickel plated

General data

Standards	IEC 61076-2-111
Pollution Degree	3
Temperature range	-25...+85 °C, depending on cable quality
Mounting set	Screw thread (M16×1.5 mm) mounting nut

Cables

No./diameter of wires	5× 1.5 mm ²
Wire isolation	PUR (br, wh, bl, bk, gnye)
Cable identification	988
Cable weight [g/m]	107,25 g
Material (wire)	Cu wire, tin plated
Resistor (core)	max. 13.3 Ω/km (20 °C)
Single wire Ø (core)	0.25 mm
Construction (core)	30× 0.25 mm (multi-strand wire class 5)
Diameter (core)	5× 1.5 mm ²
Material (wire isolation)	PUR
Wire-Ø incl. isolation	2.4 mm ±5%
Color/numbering of wires	br, bk, bl, wh, gnye longitudinally striped
thermal resistance	flame retardant
Nominal voltage	900 V AC
Test voltage	3310 V AC
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C

Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879759199
eClass	27279220
Packaging unit	1.000